




CATALOG 2025



 PHUC MY GIA CUSTOM FURNITURE CO., LTD

 Phucmygia.vn

 02866.897.666

 No. 39, Highway 1A, Hiep Binh Phuoc ward, Thu Duc city, HCMC

No. 264, Tran Nao street, An Khanh ward, District 2, HCM

HIGH-QUALITY WOODEN FLOORING

HIGH-QUALITY WOODEN FLOORING


■ High-quality wooden flooring is crafted using advanced joint technology, creating harmonious and impressive overall patterns that highlight the beauty of each natural wood grain.

- Made from precious wood types such as oak, elm, teak, and walnut, it offers unique grain patterns, luxurious colors, and exceptional durability.
- Each floorboard has a surface thickness of 1.2mm and an ideal size of 450*450*15mm, ensuring strength and excellent load-bearing capacity throughout its usage.
- Notably, the flooring is completely safe for health and free from harmful chemicals, allowing you and your family to use it with peace of mind. This is particularly important in modern living environments where health is prioritized.
- Wooden flooring can regulate air, keeping warm in winter and cool in summer, providing comfort for users.

■ The wooden flooring collection at Phuc My Gia features a rich color palette, ranging from soft light tones to warm dark shades, easily blending with any interior space.

MAIN FEATURES

- High artistic value: Through techniques such as pattern matching, carving, and decoration, custom patterns such as flowers, geometric shapes, and classical motifs are clearly expressed, making each floor panel a "3D work of art."
- Diverse materials: Often uses various types of wood (such as oak, walnut, maple, teak) or combines woods of the same type but with different color tones, creating richness and diversity.
- Complex manufacturing process: Requires precise cutting and seamless joining; some high-end products combine manual carving or decoration with metal/stone (such as brass, seashells).
- High added value: Custom design, handmade products, collectible value, and prices are usually higher than ordinary wooden floors.
- Environmental protection: Similar to ordinary natural wood floors, no glue is used (traditional joining or interlocking), meeting environmental protection standards.

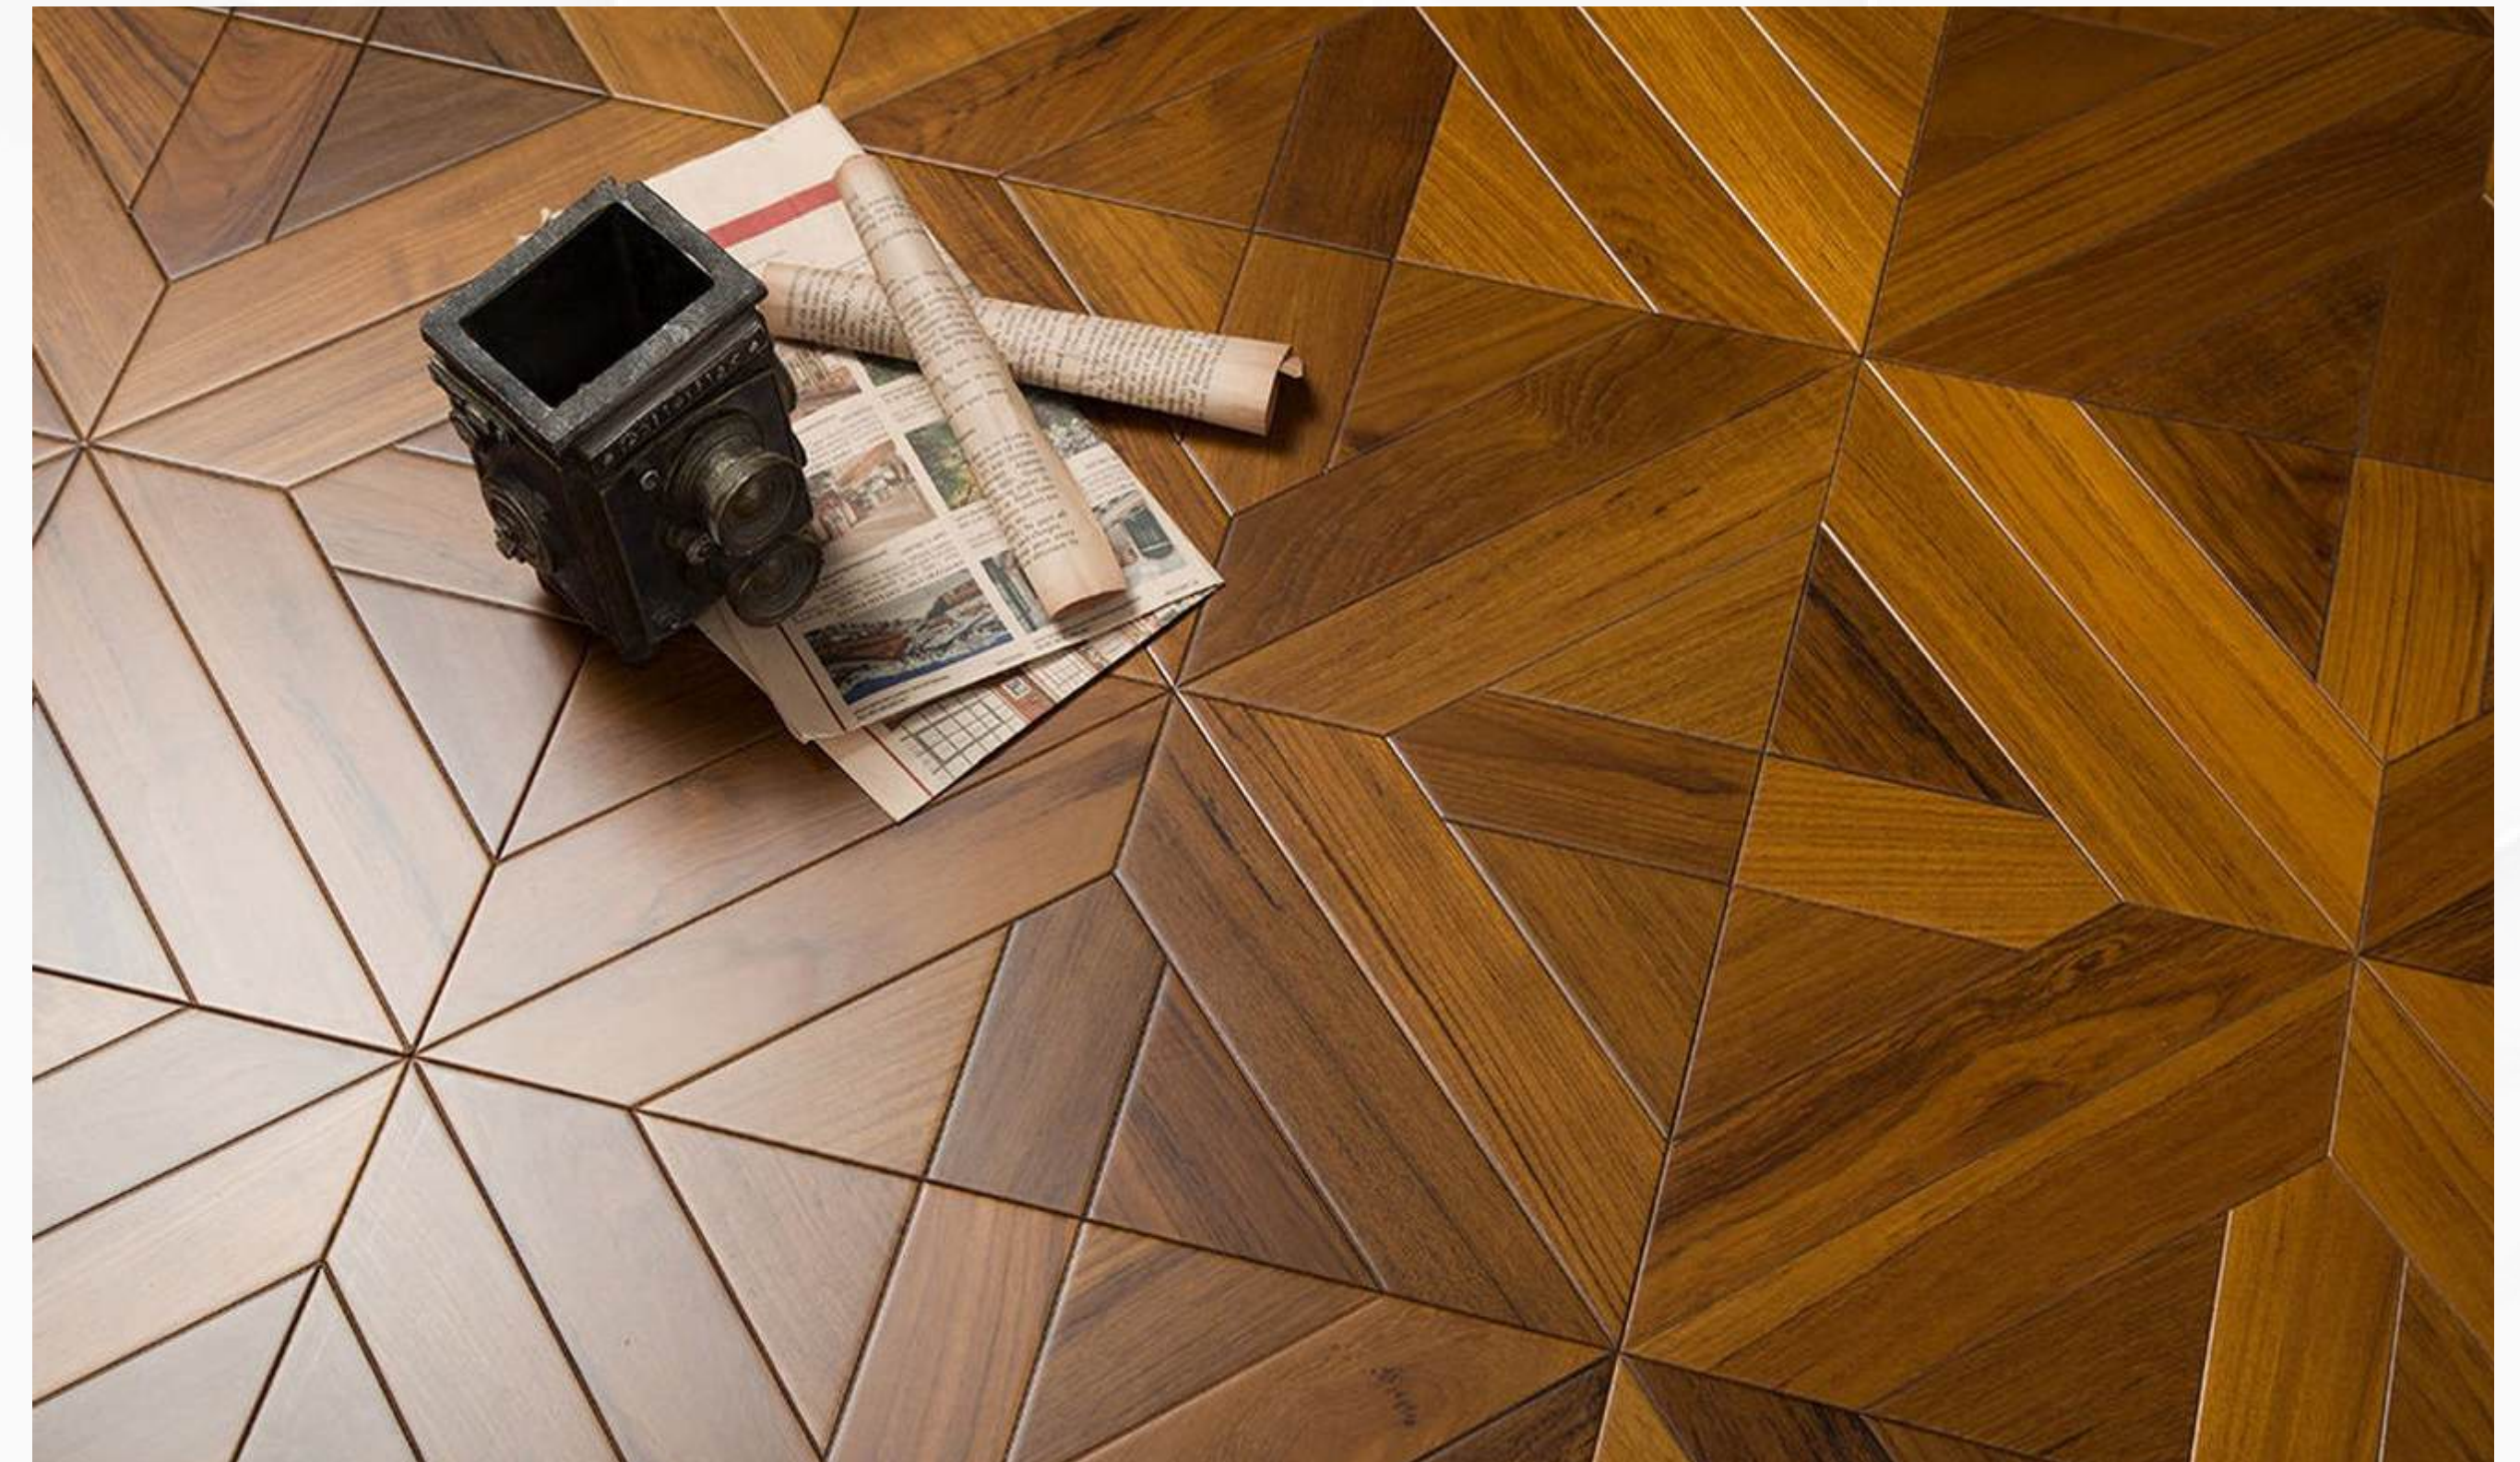

MATERIALS & TECHNOLOGY

Material Selection:

- Single Wood Color Matching: Uses the same type of wood, undergoing staining or carbonization to create contrast in brightness (e.g., light oak + dark oak).
- Diverse Wood Matching: Combines different types of wood such as oak, walnut, and maple, emphasizing the differences in wood grain patterns.

Surface Treatment:

- Hand Carving: Raised floral patterns and totems add depth and vibrancy (requires regular maintenance and cleaning to maintain durability).
- Inlay Technique: Combines materials such as brass, mother-of-pearl, and gemstones to create luxury and sophistication.
- Antiquing: Techniques such as distressing, smoking, and aging are used to create a vintage feel.



SPECIFICATIONS AND INSTALLATION

- Flexible Dimensions:

Modular Pattern Assembly: Each panel is typically 450mm × 450mm or 600mm × 600mm, making it convenient for combination and paving.

Comprehensive Customization: Oversized dimensions (e.g., 1.2m × 1.2m) are a single piece of carving, suitable for villa halls and exhibition rooms.

- Installation Requirements:

Professional Construction: Requires precise alignment of joints and calibration of pattern continuity; experienced workers are needed to handle it.

Base Treatment: The flatness deviation of the floor surface should be $\leq 2\text{mm/m}^2$; self-leveling is recommended to flatten the base.

Installation Method: Use adhesive (for complex patterns) or interlocking (for modular patterns).



MAINTENANCE TIPS

Maintenance: Complex joints are prone to dust accumulation, so vacuum and wipe with a soft cloth every month, and deep polish with wax once a year.

Avoid Collisions with Hard Objects: Carved or decorated parts are very thin, so attach soft pads under the legs of furniture.

Control Temperature and Humidity: Ideal humidity is 40%-60%; excessive temperature differences can easily cause the joints to crack.



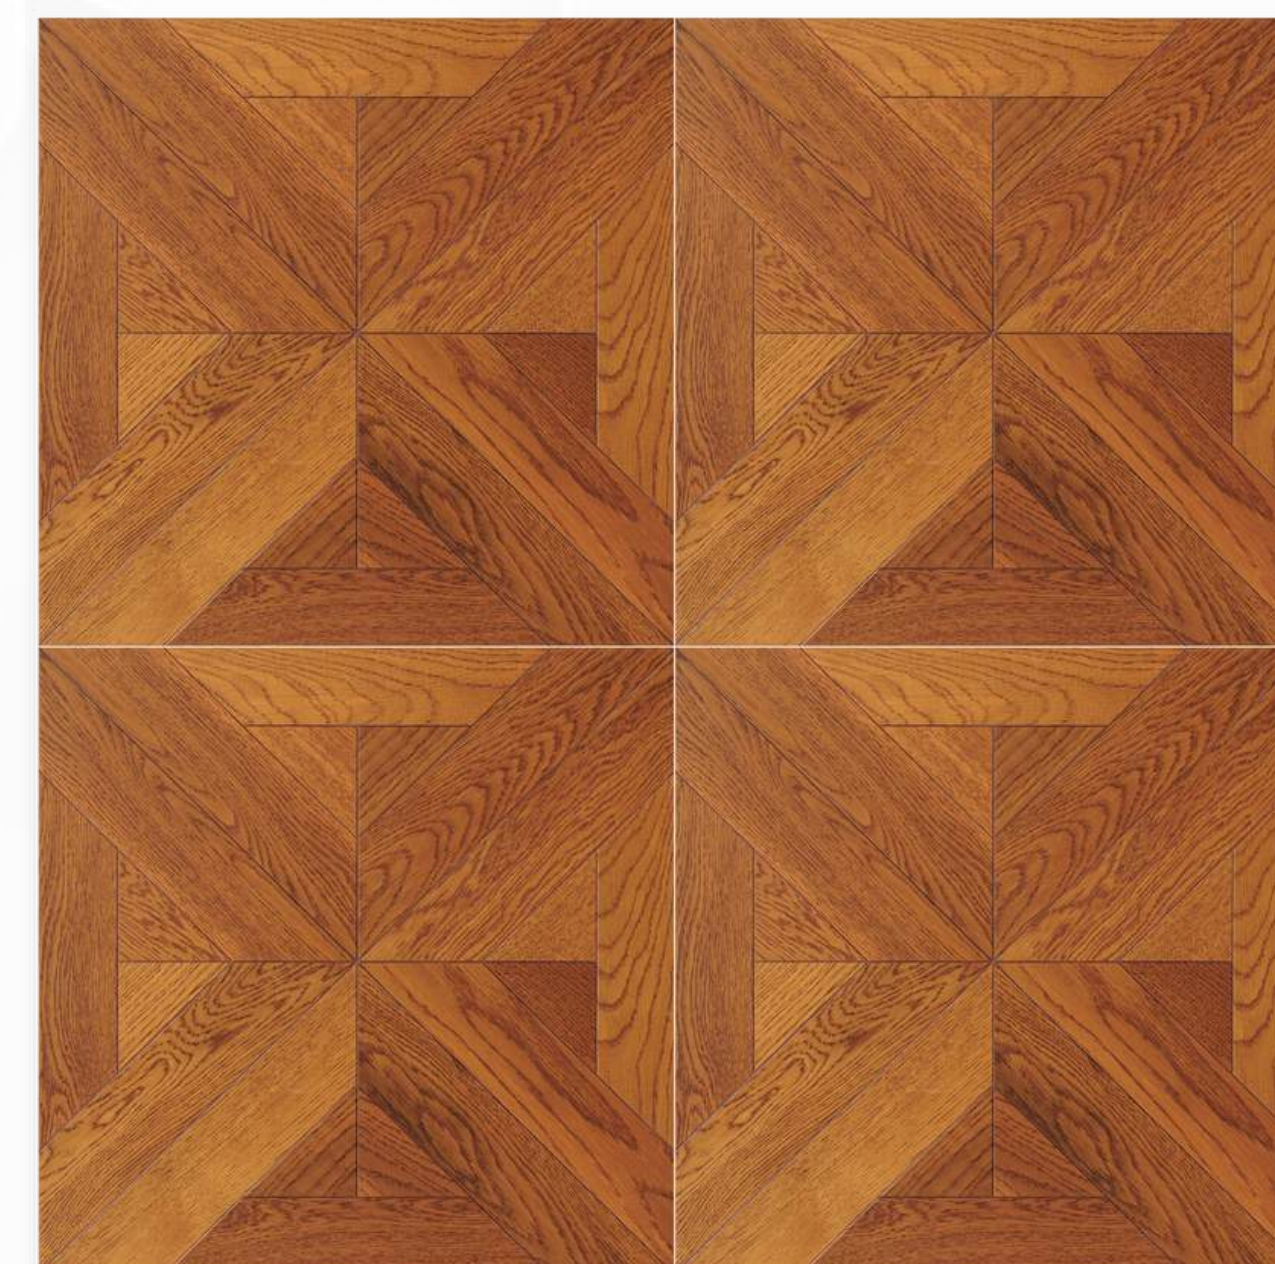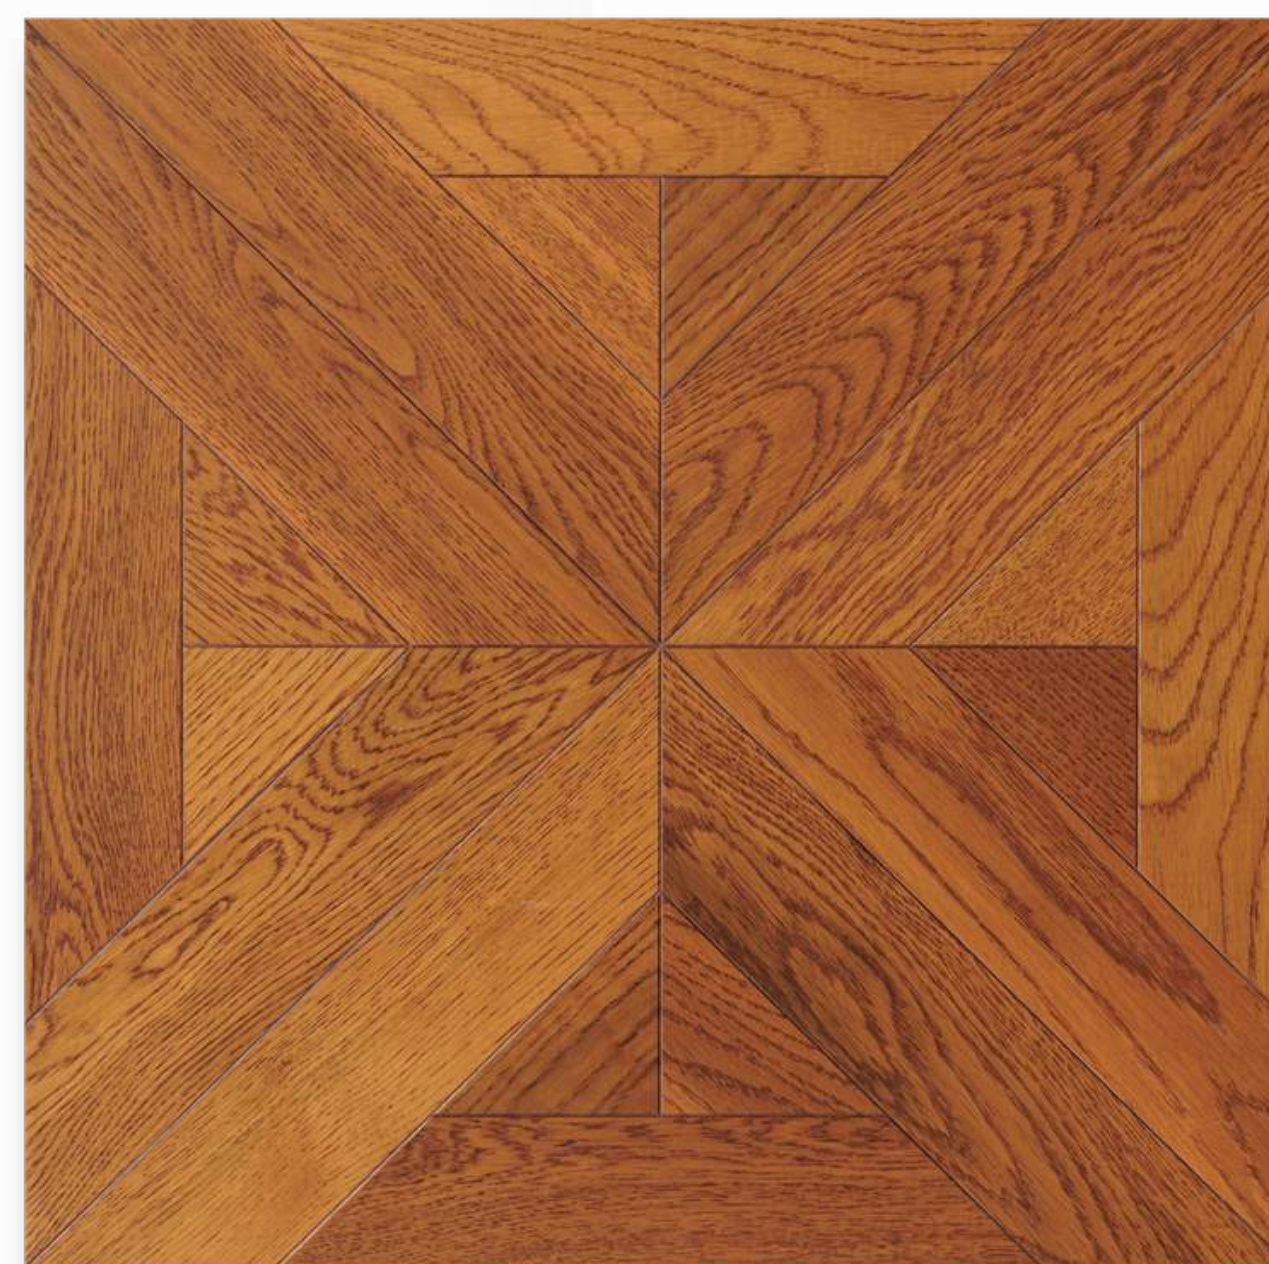

Product Code : Oak Parquet Flooring 5701

Material: Oak wood



Packaging: 450*450*15MM*10/2.025M2

Technology: Brushed finish

Surface thickness: 1.2mm

Skirting Board: 5701



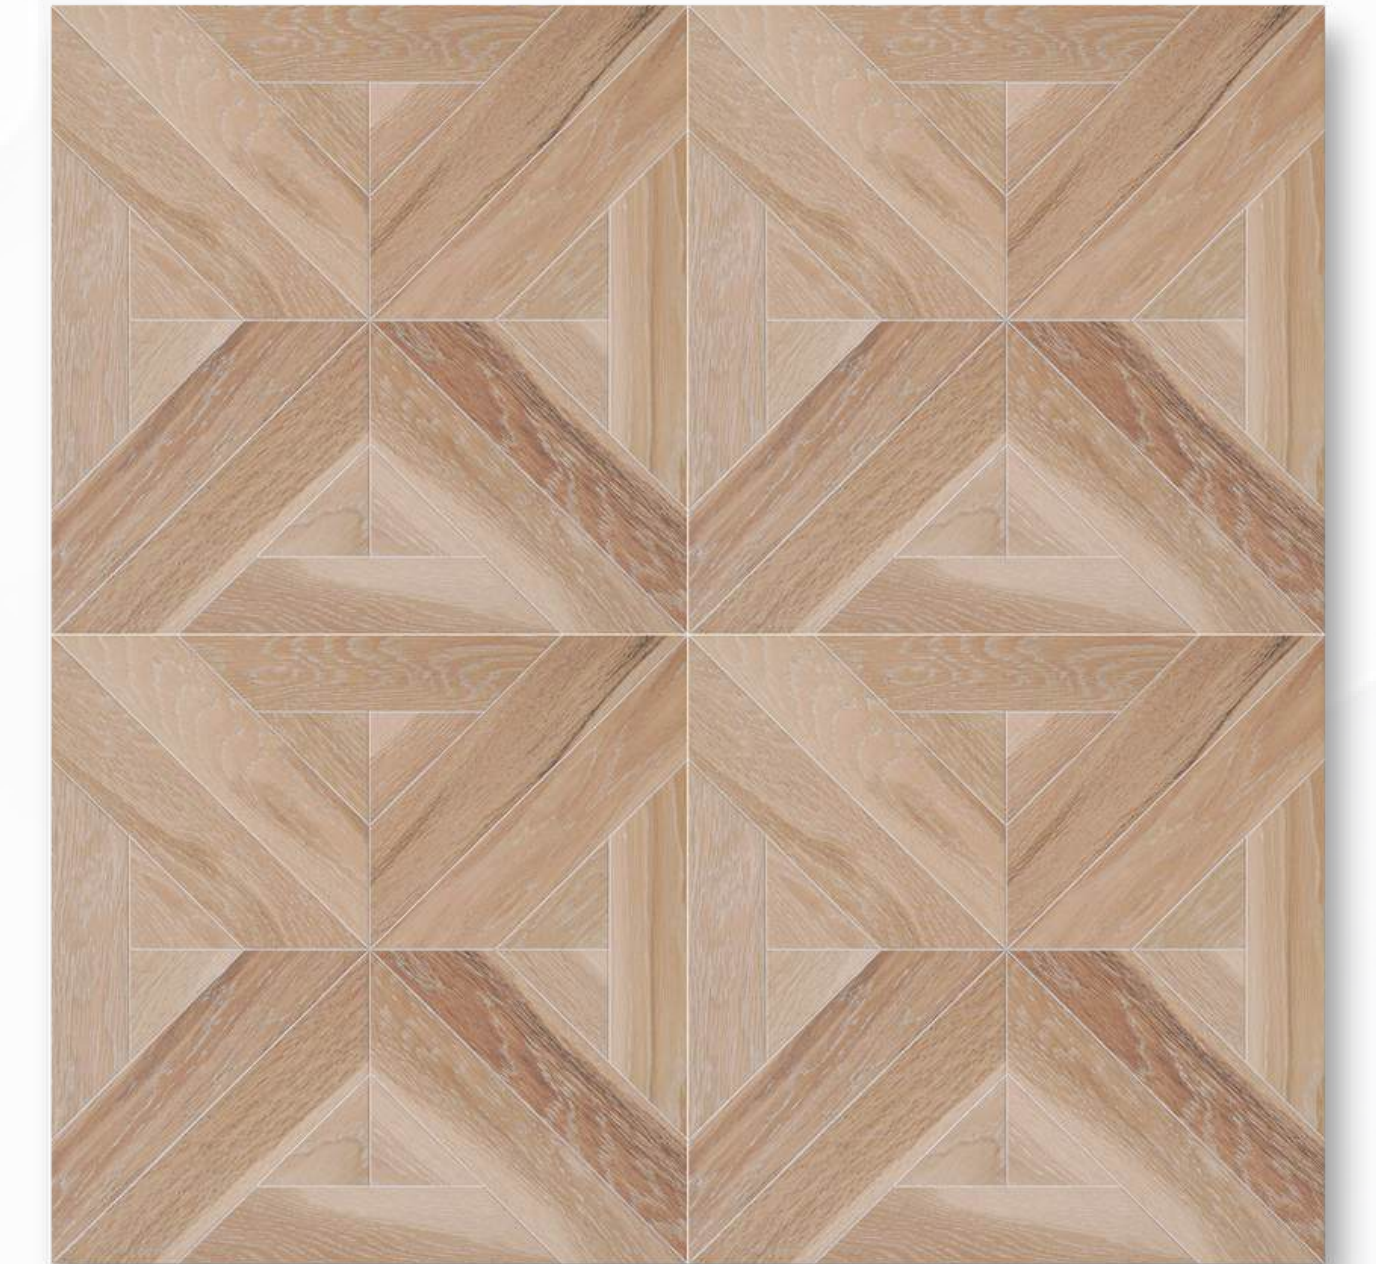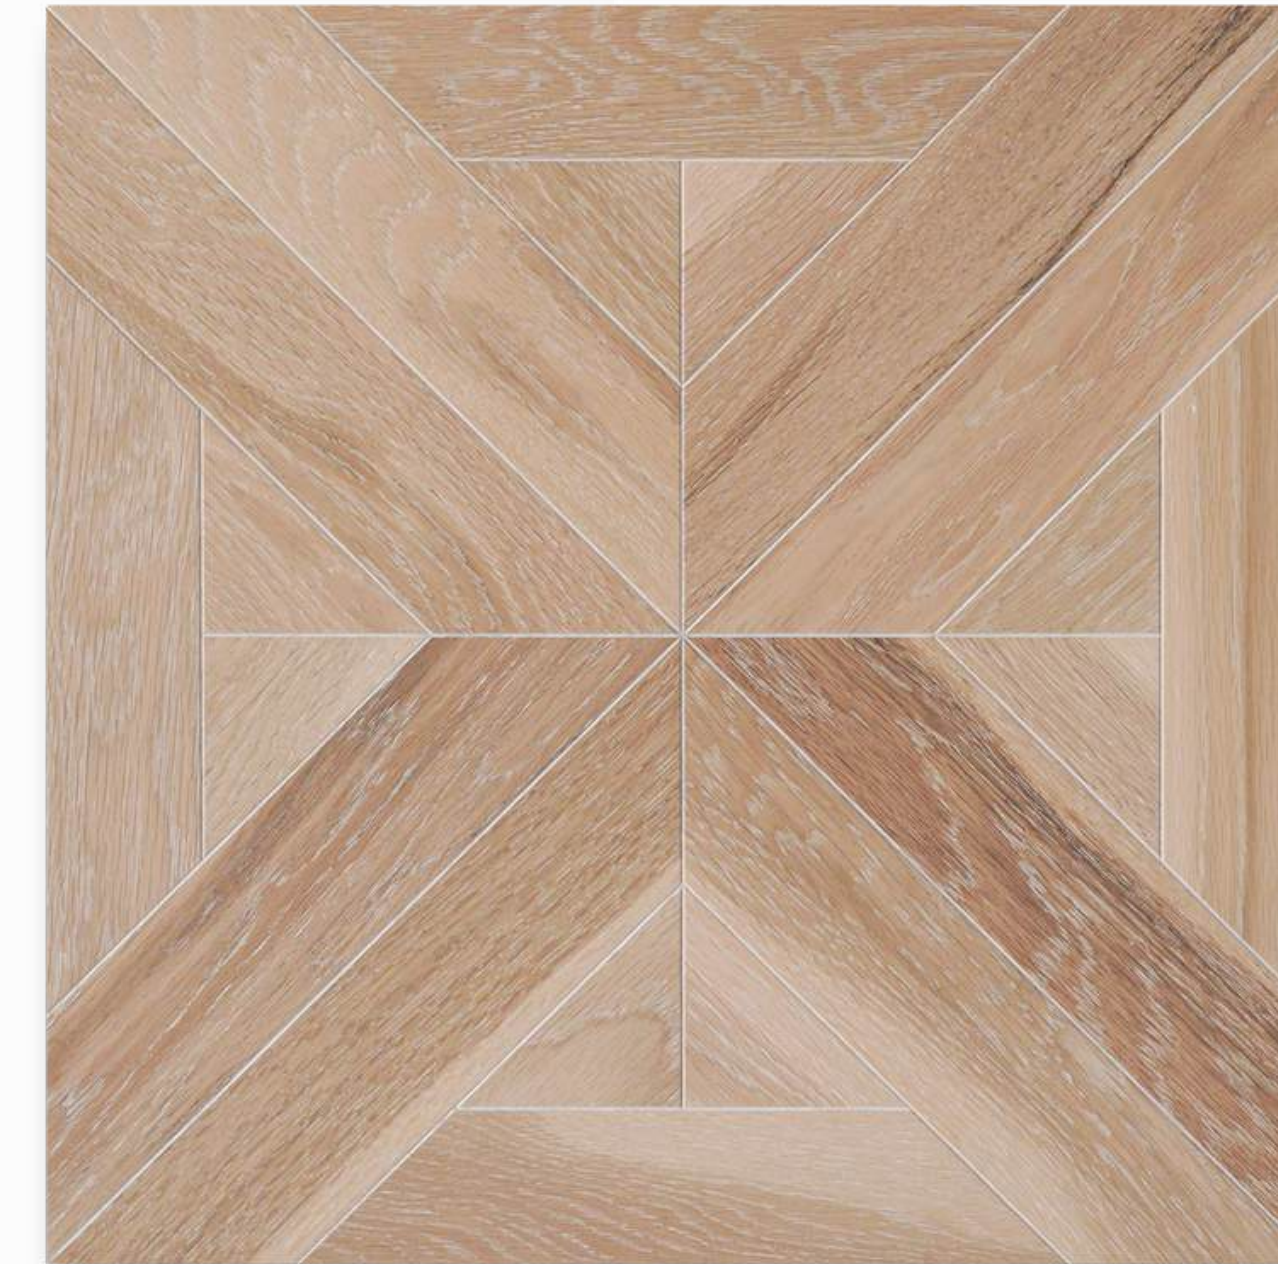

Product Code : Oak Parquet Flooring 5708

Material: Oak wood


Packaging: 450*450*15MM*10/2.025M2

Technology: Brushed finish

Surface thickness: 1.2mm

Skirting Board: 5708



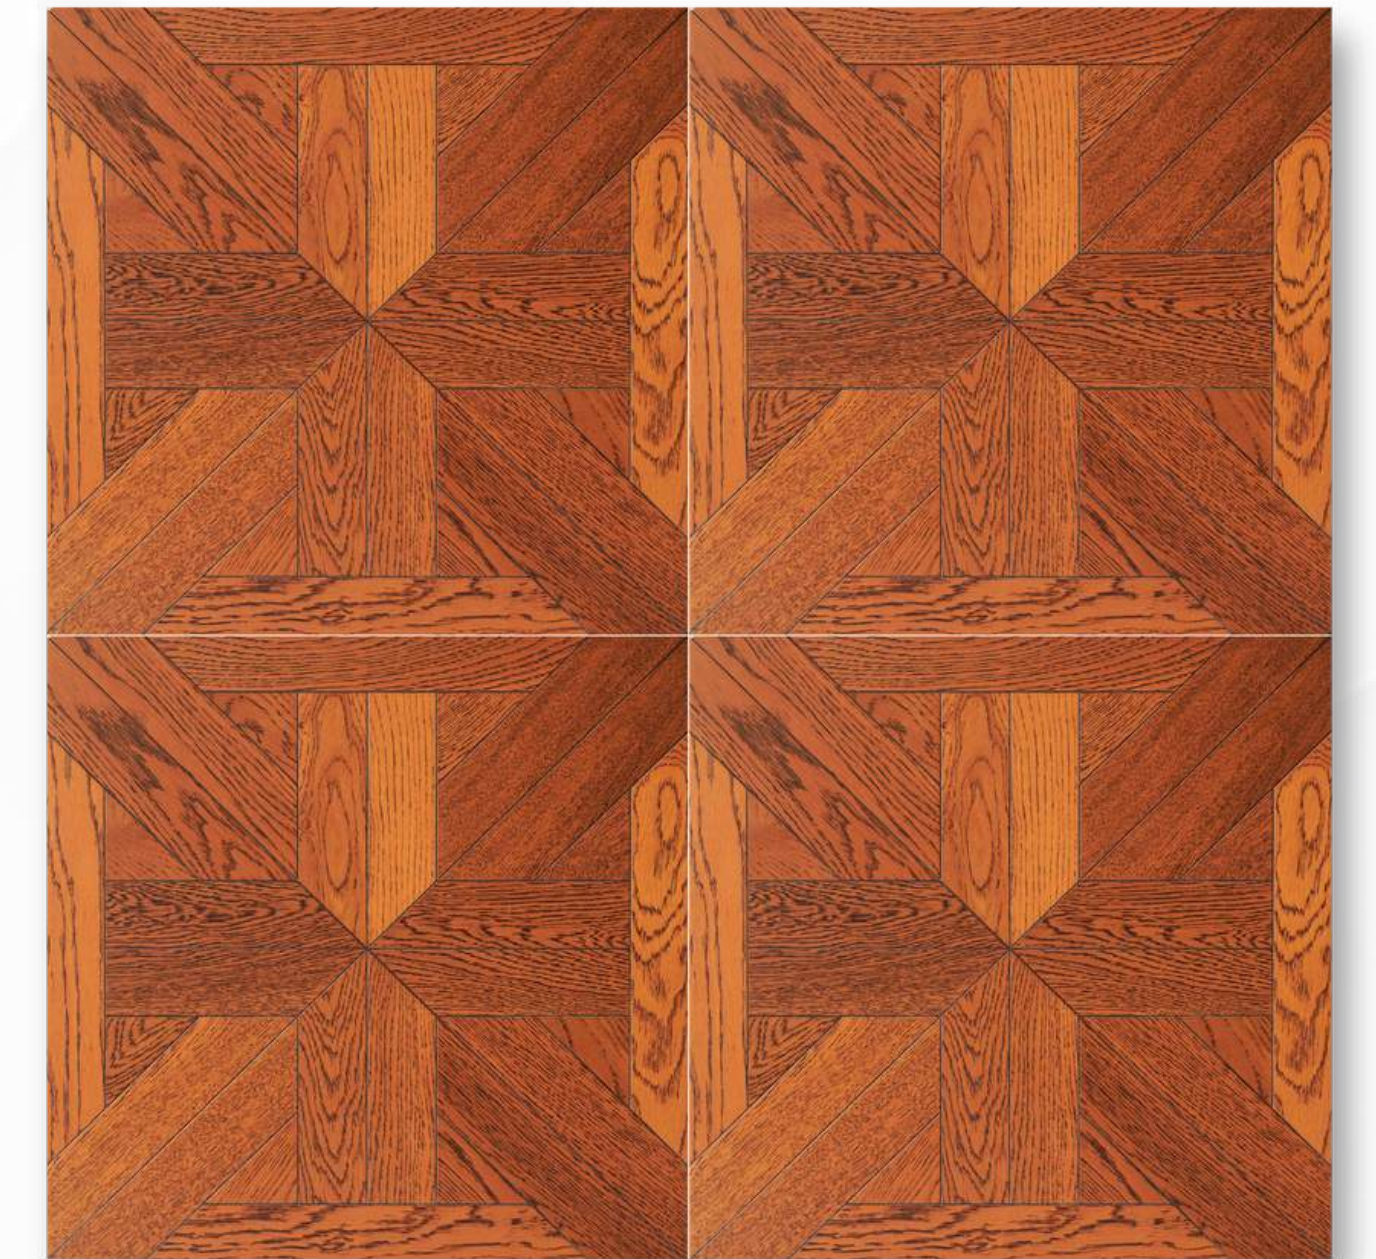

Product Code : Oak Parquet Flooring 5716

Material: Oak wood


Packaging: 450*450*15MM*10/2.025M2

Technology: Brushed finish

Surface thickness: 1.2mm

Skirting Board: 5716



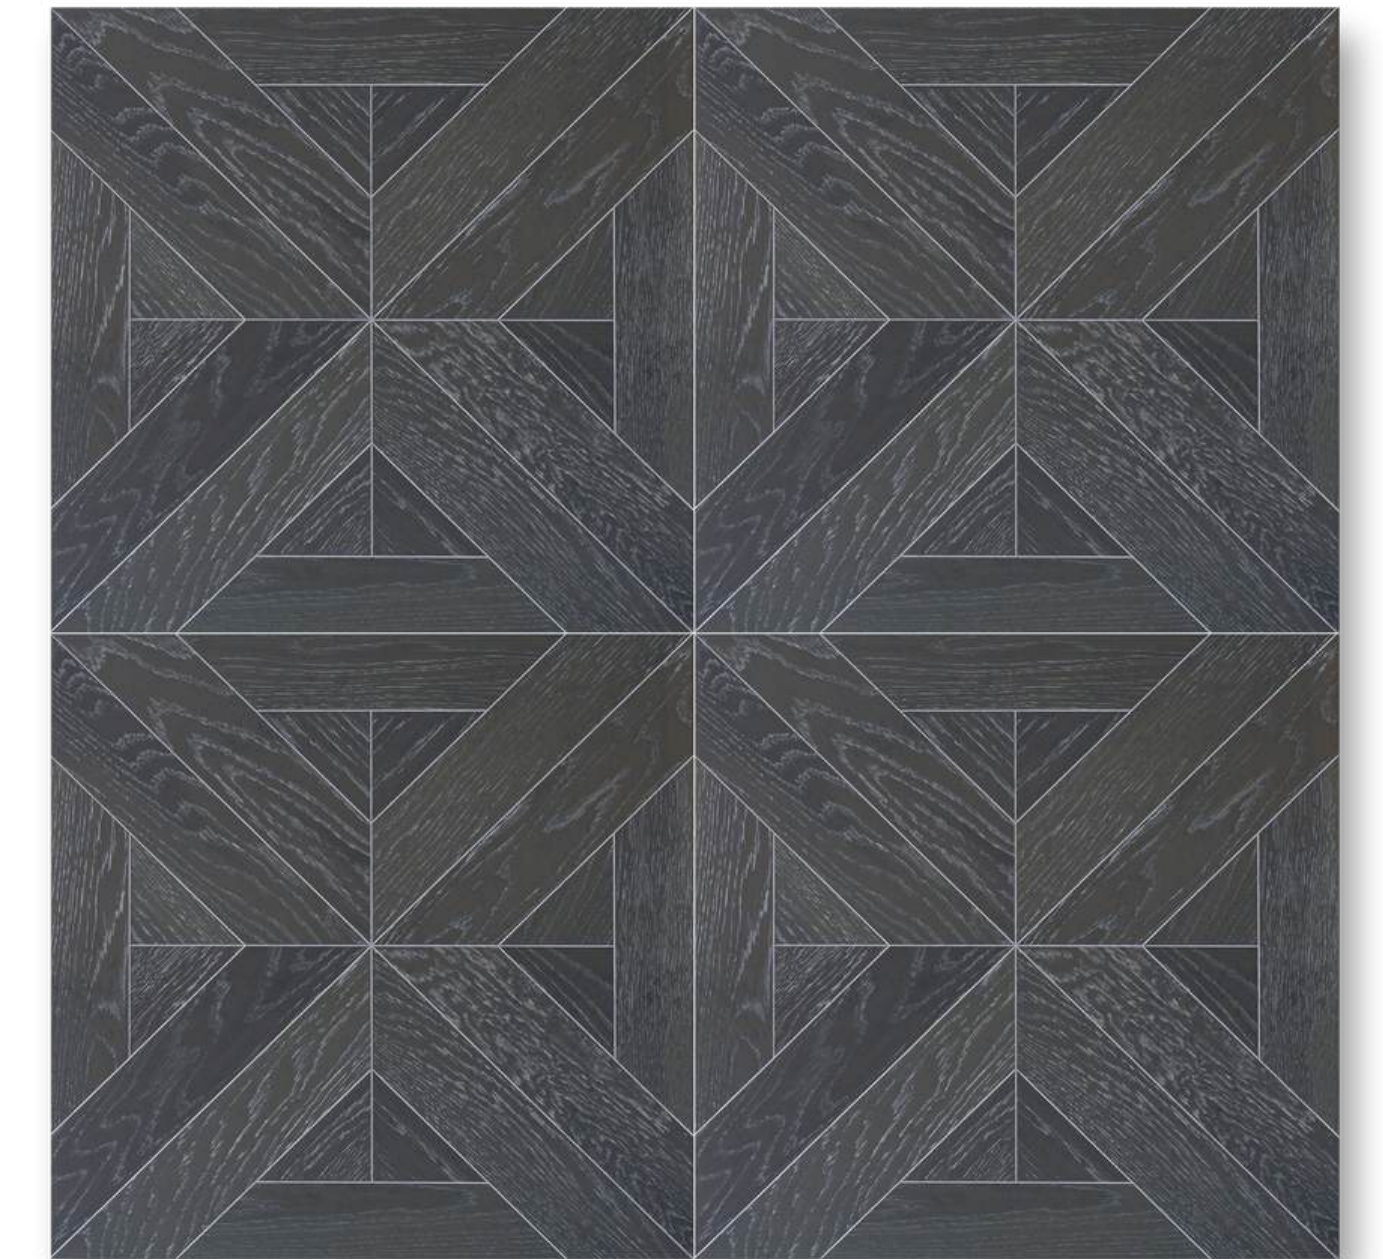

Product Code : Oak Parquet Flooring 5739

Material: Oak wood


Packaging: 450*450*15MM*10/2.025M2

Technology: Brushed finish

Surface thickness: 1.2mm

Skirting Board: 5739



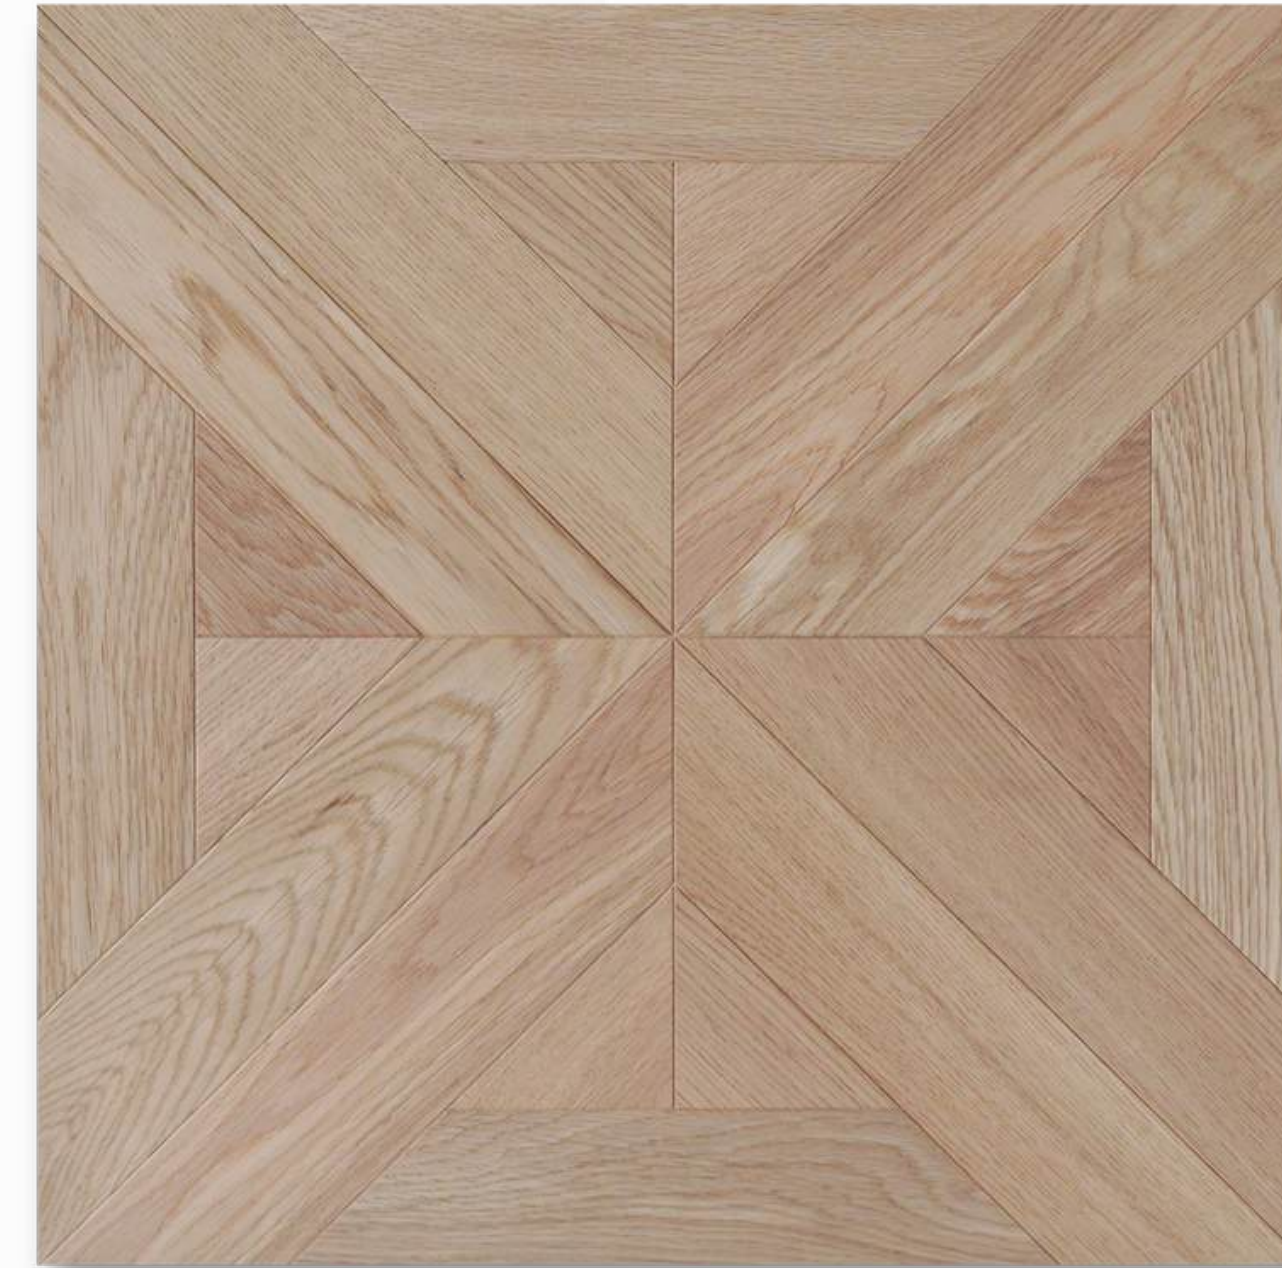

Product Code : Oak Parquet Flooring 5759

Material: Oak wood

Packaging: 450*450*15MM*10/2.025M2

Technology: Brushed finish

Surface thickness: 1.2mm

Skirting Board: 5759





Product Code : Elm Parquet Flooring 5615

Material: Elm wood



Packaging: 450*450*15MM*10/2.025M2

Technology: Faux wood carving

Surface thickness: 1.2mm

Skirting Board: 5615



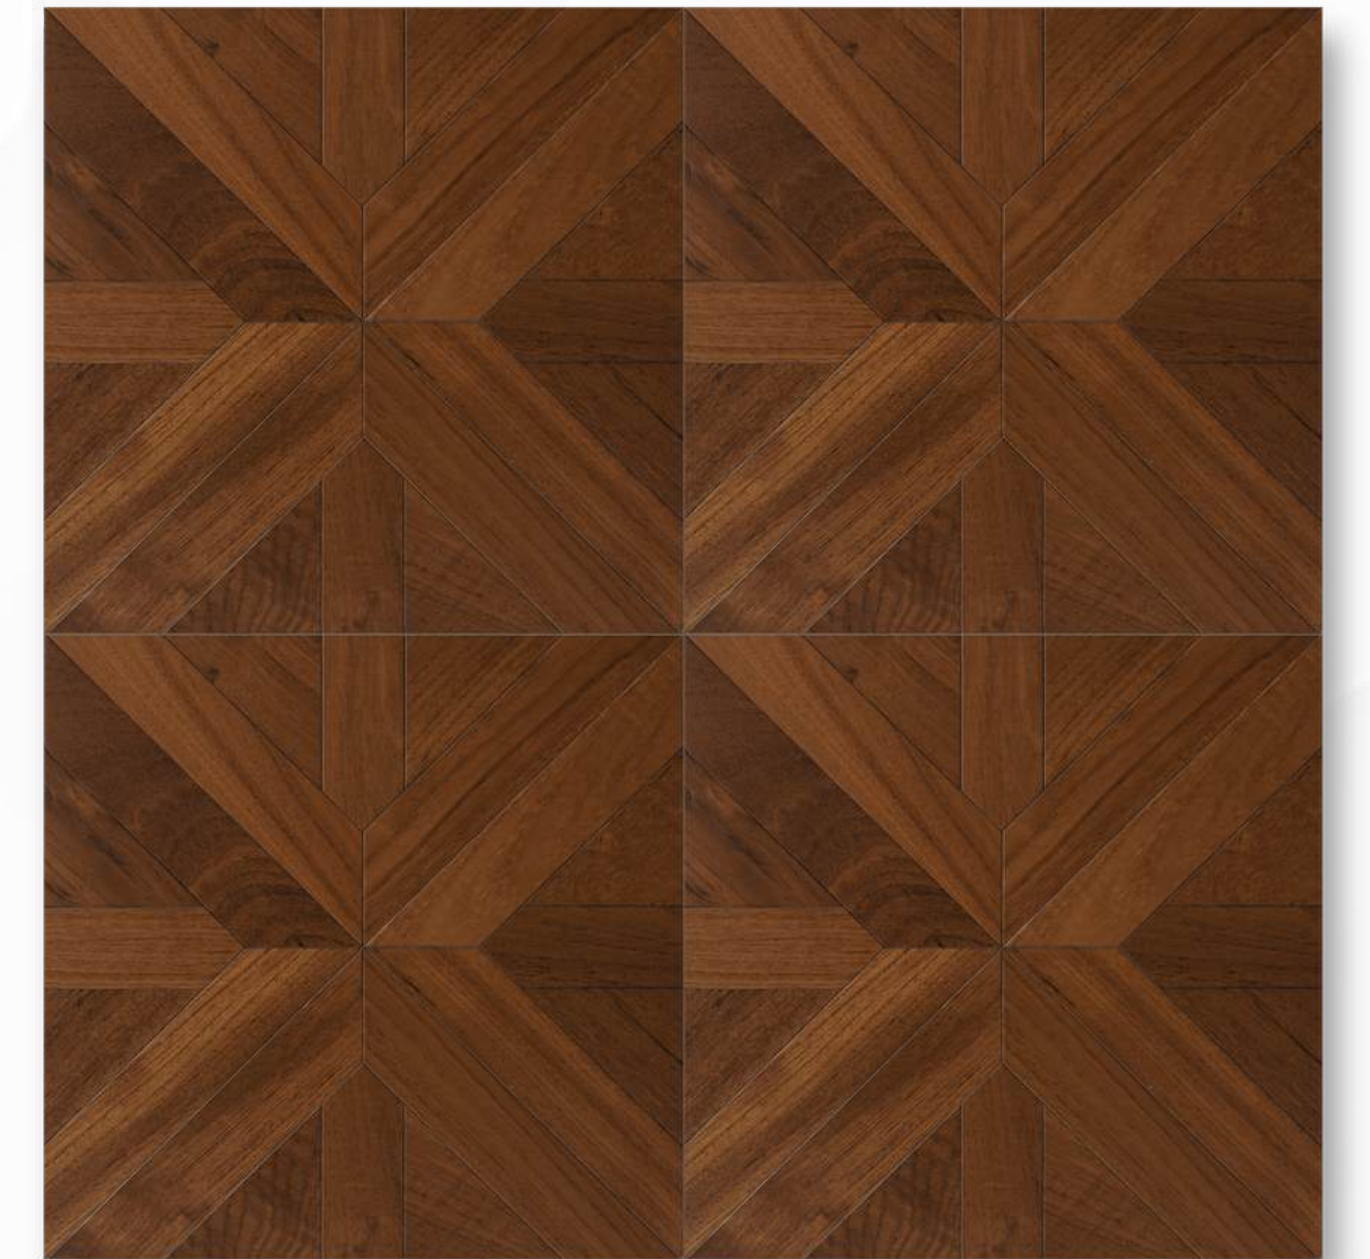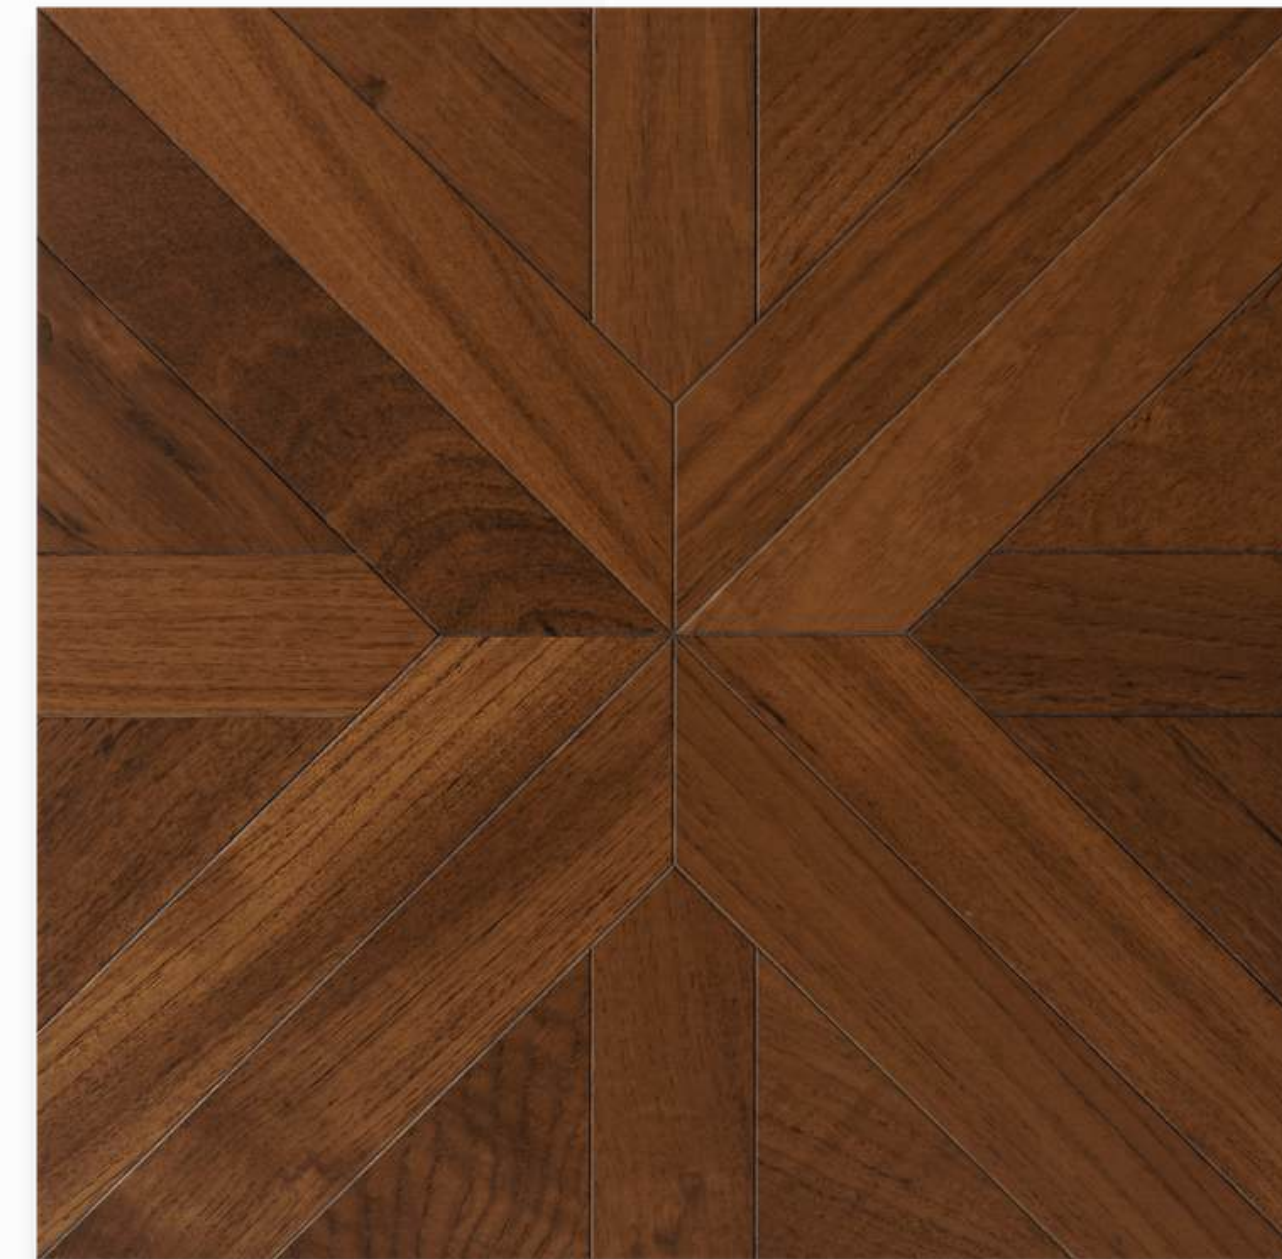

Product Code : Teak Parquet Flooring 5813

Material: Teak wood



Packaging: 450*450*15MM*10/2.025M2

Technology: Edge

Surface thickness: 1.2mm

Skirting Board: 5813



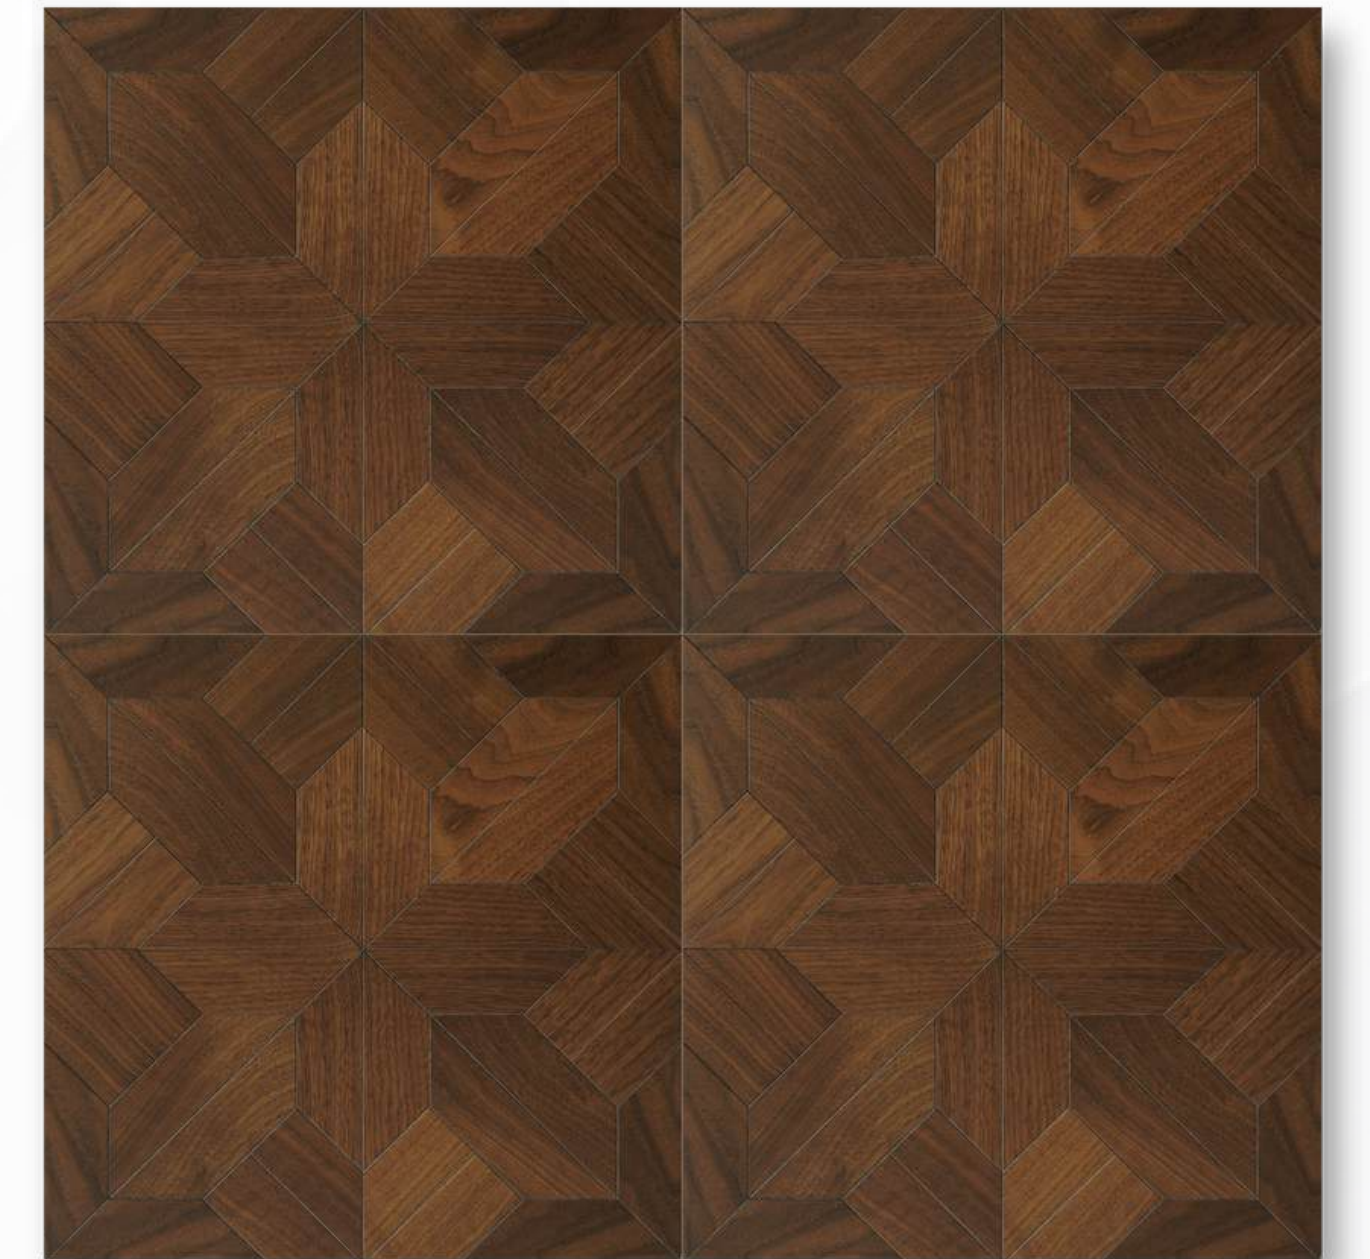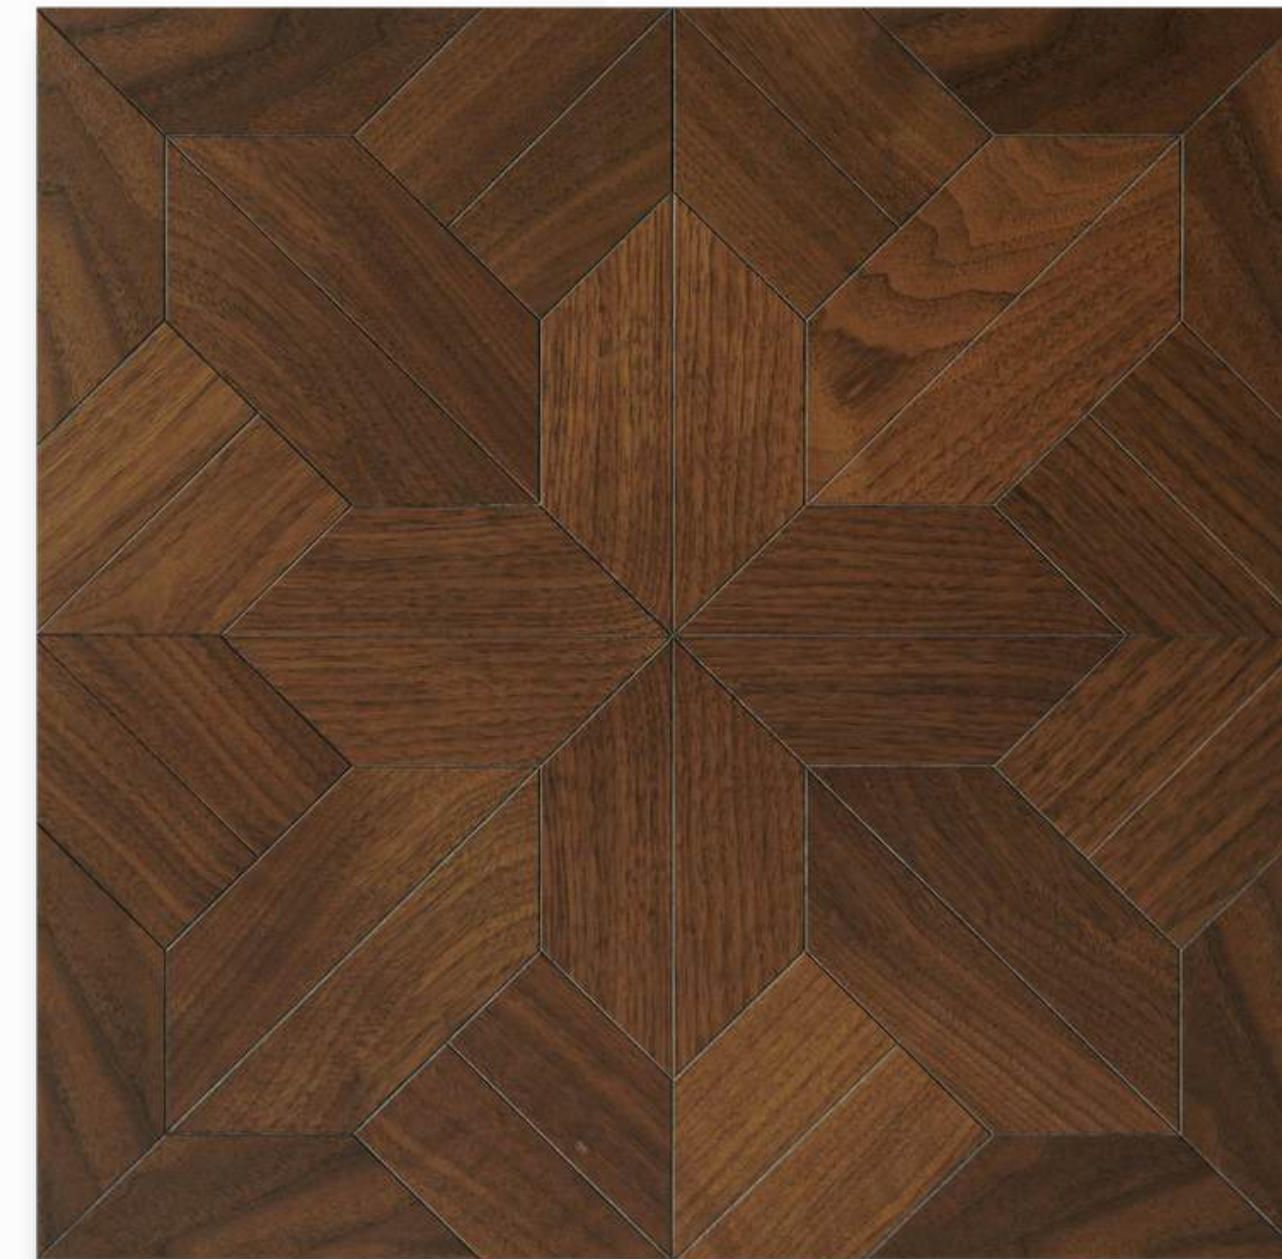

Product Code : Walnut Parquet Flooring 5839

Material: Black walnut wood


Packaging: 450*450*15MM*10/2.025M2

Technology: Edge

Surface thickness: 1.2mm

Skirting Board: 5839



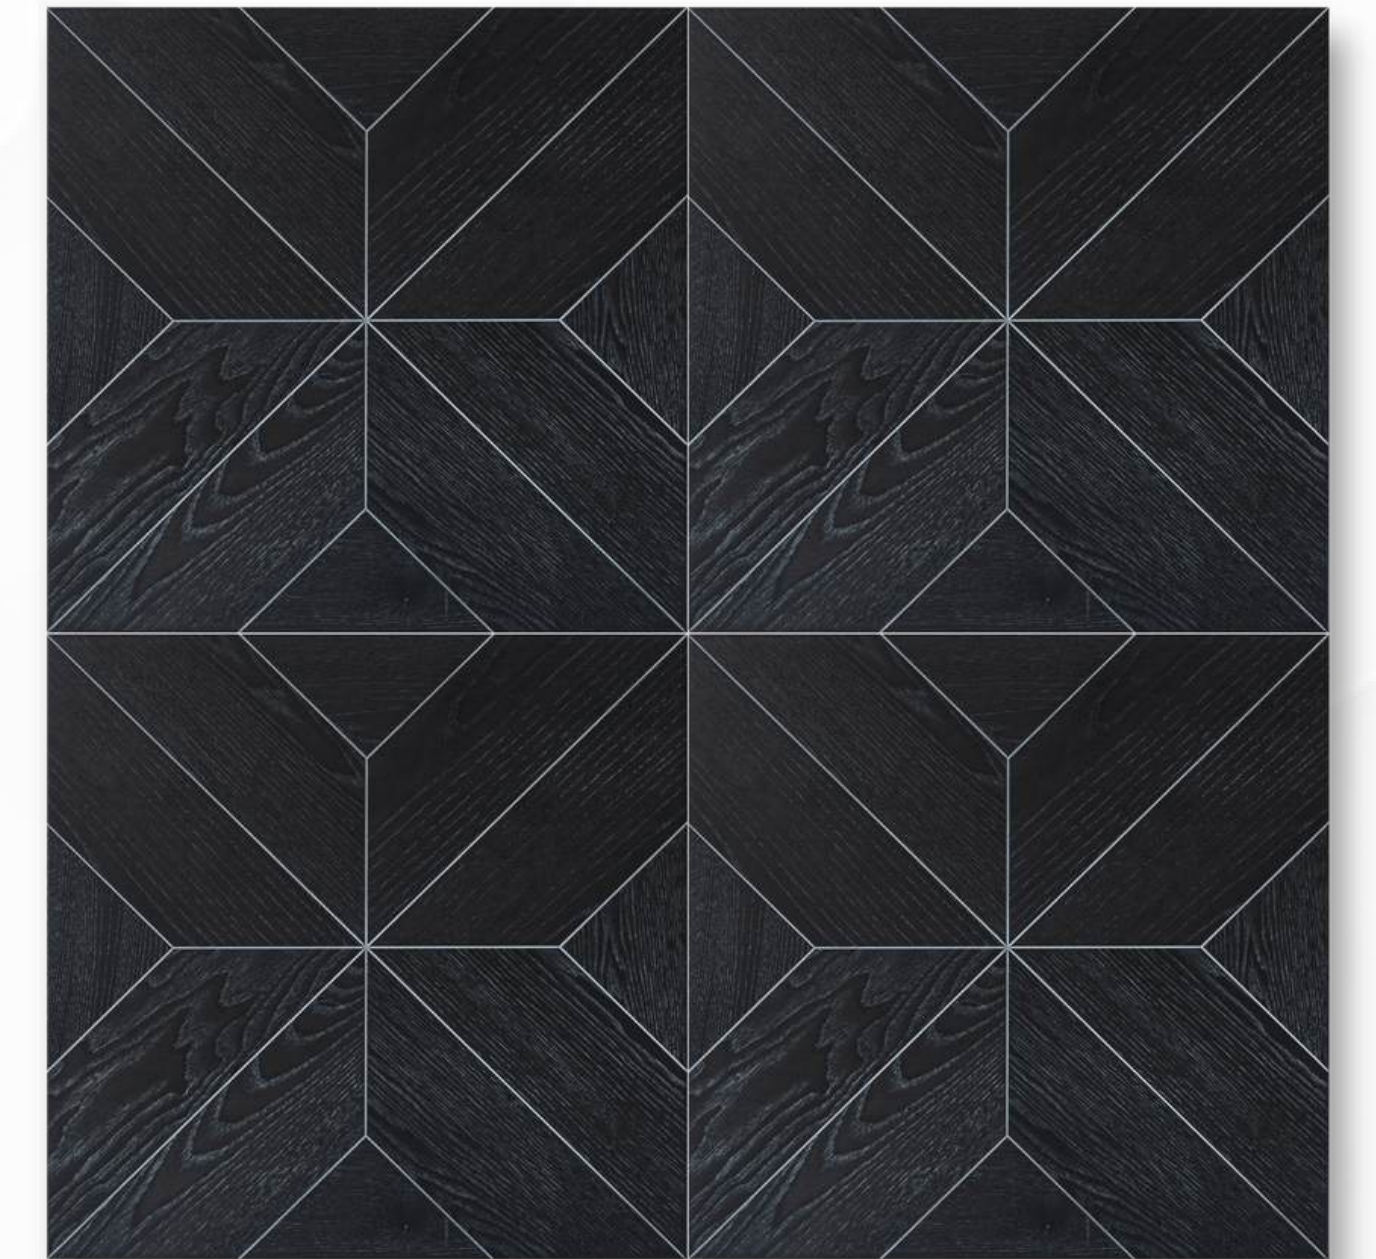

Product Code : Ash Parquet Flooring 5736

Material: Ash wood

Packaging: 450*450*15MM*10/2.025M2

Technology: Brushed finish

Surface thickness: 1.2mm

Skirting Board: 5736





Product Code : 3-layer Floral Lamination Technology 5915-3

Material: Large-leaf Quince Wood + Black Walnut Wood


Packaging: 450*450*15MM*10/2.025M2

Technology: Edges

Surface thickness: 1.2mm

Skirting Board: 5915-3



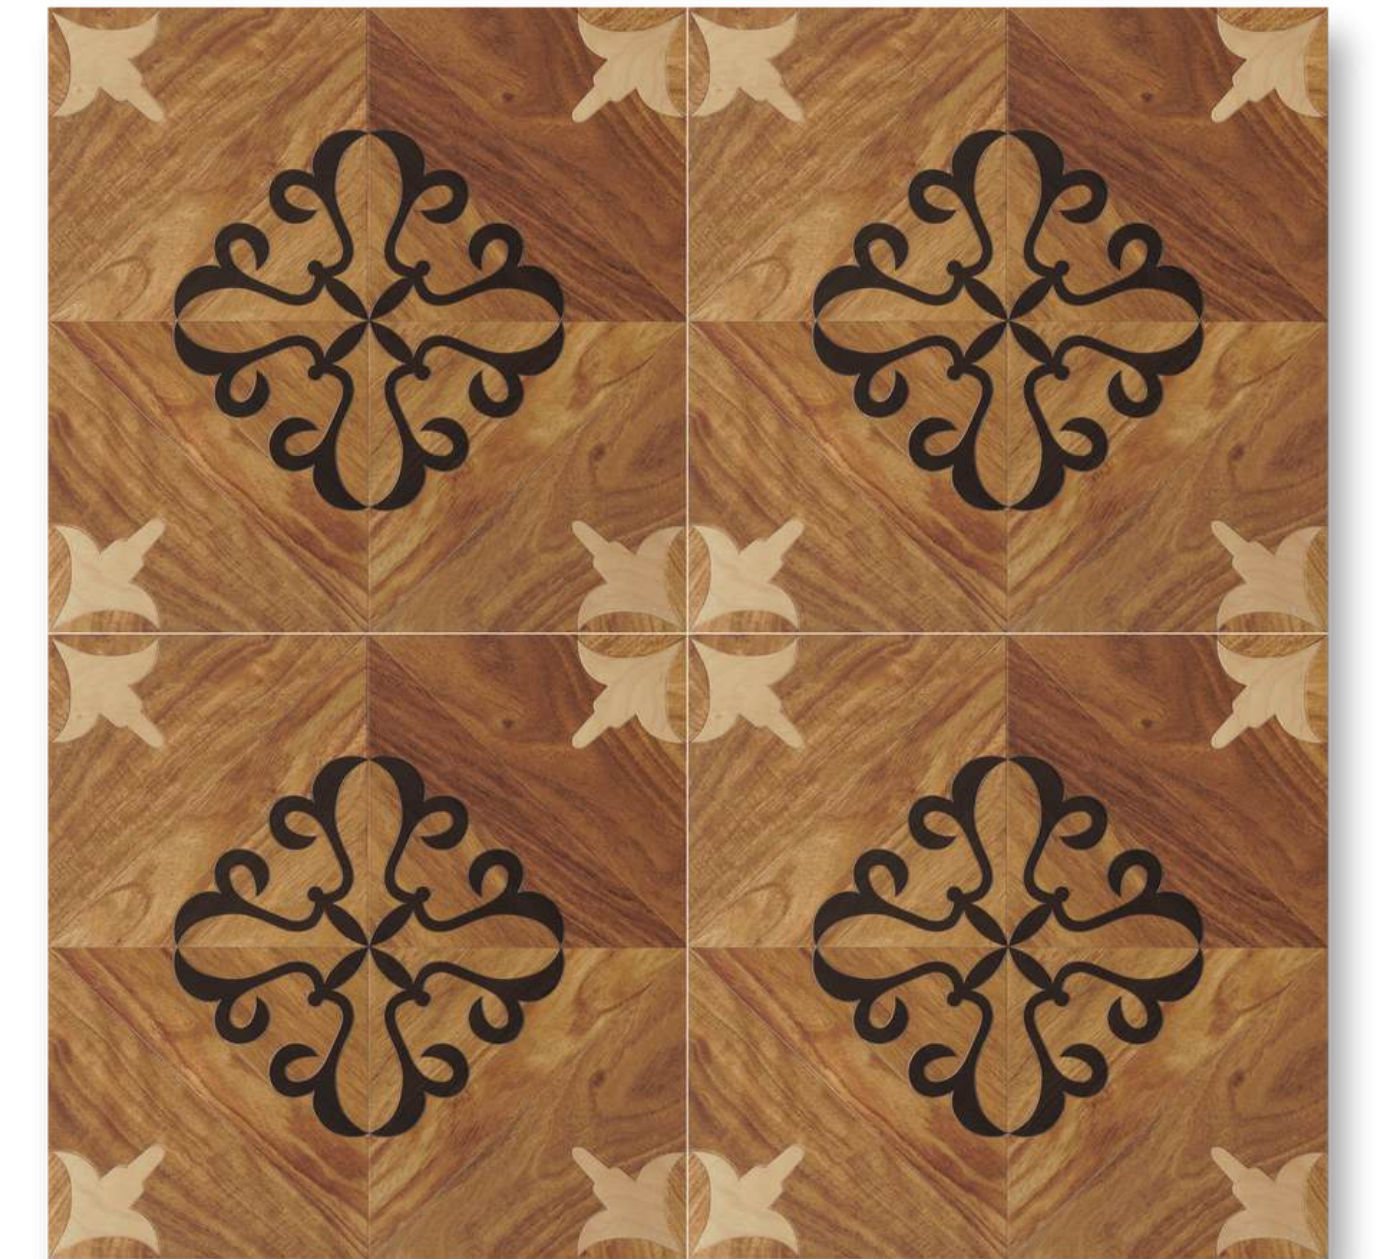

Product Code : Imperial Palace Parquet Flooring 5801-2

Material: Quince wood + Rosewood + Chinese maple + Flat edge

Packaging: 450*450*15MM*10/2.025M2



Technology: Grafting

Surface thickness: 0.6mm

2

Skirting Board: 5801-2








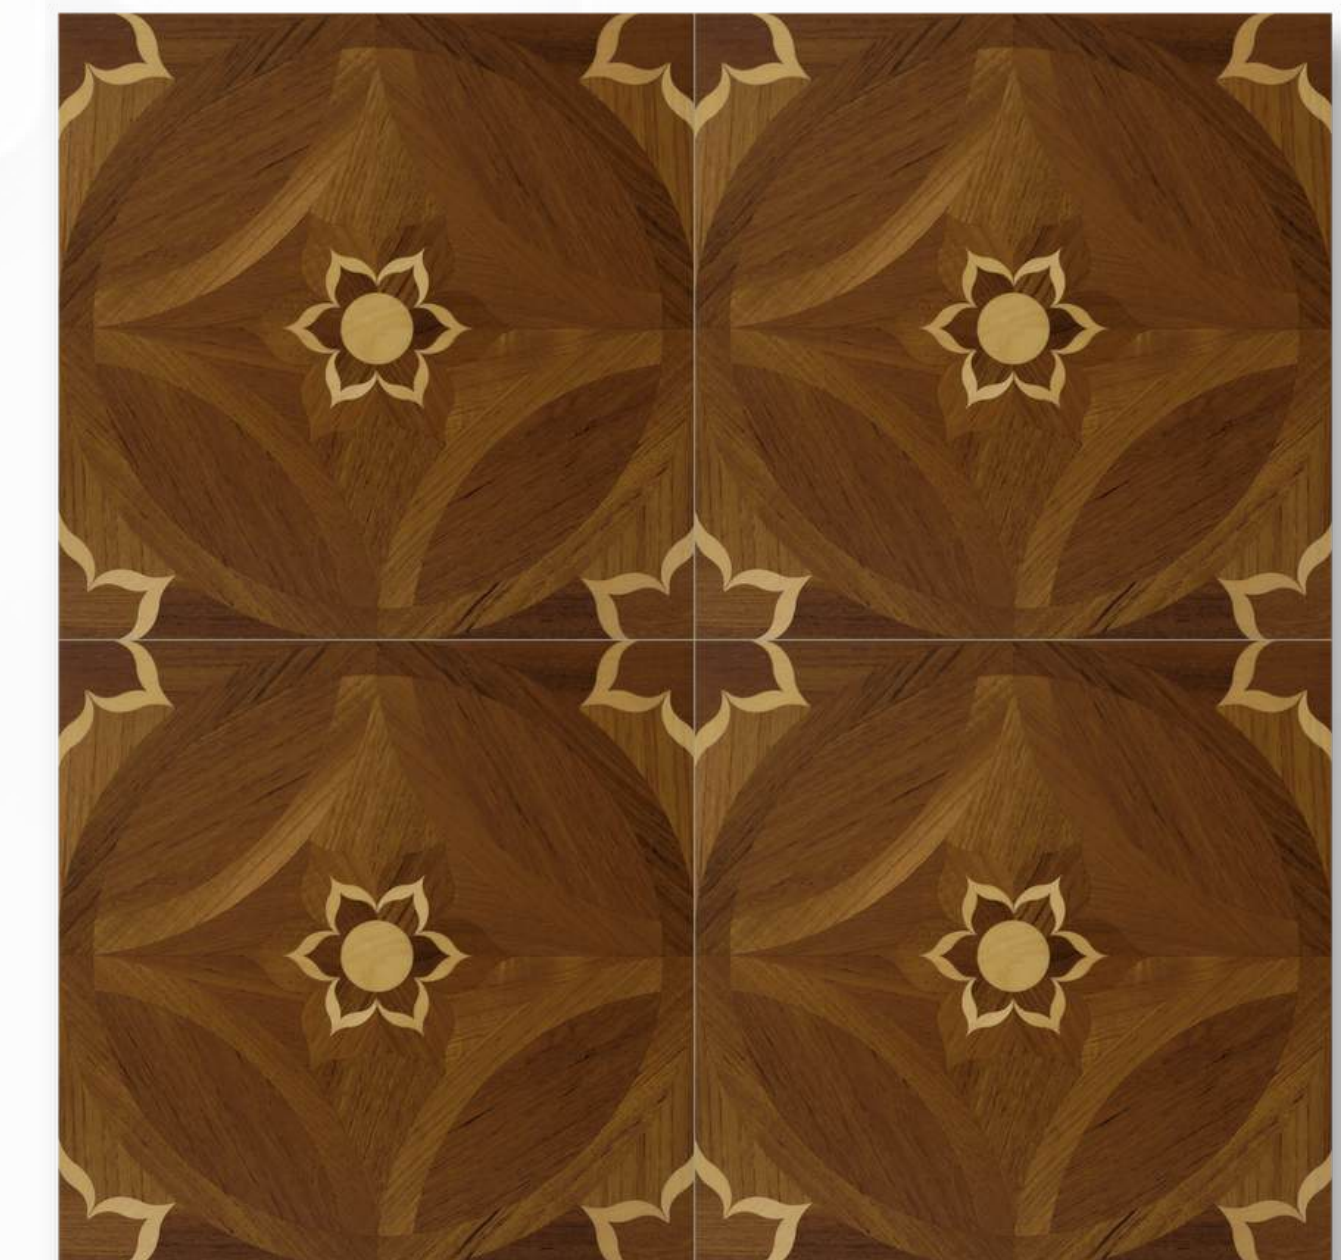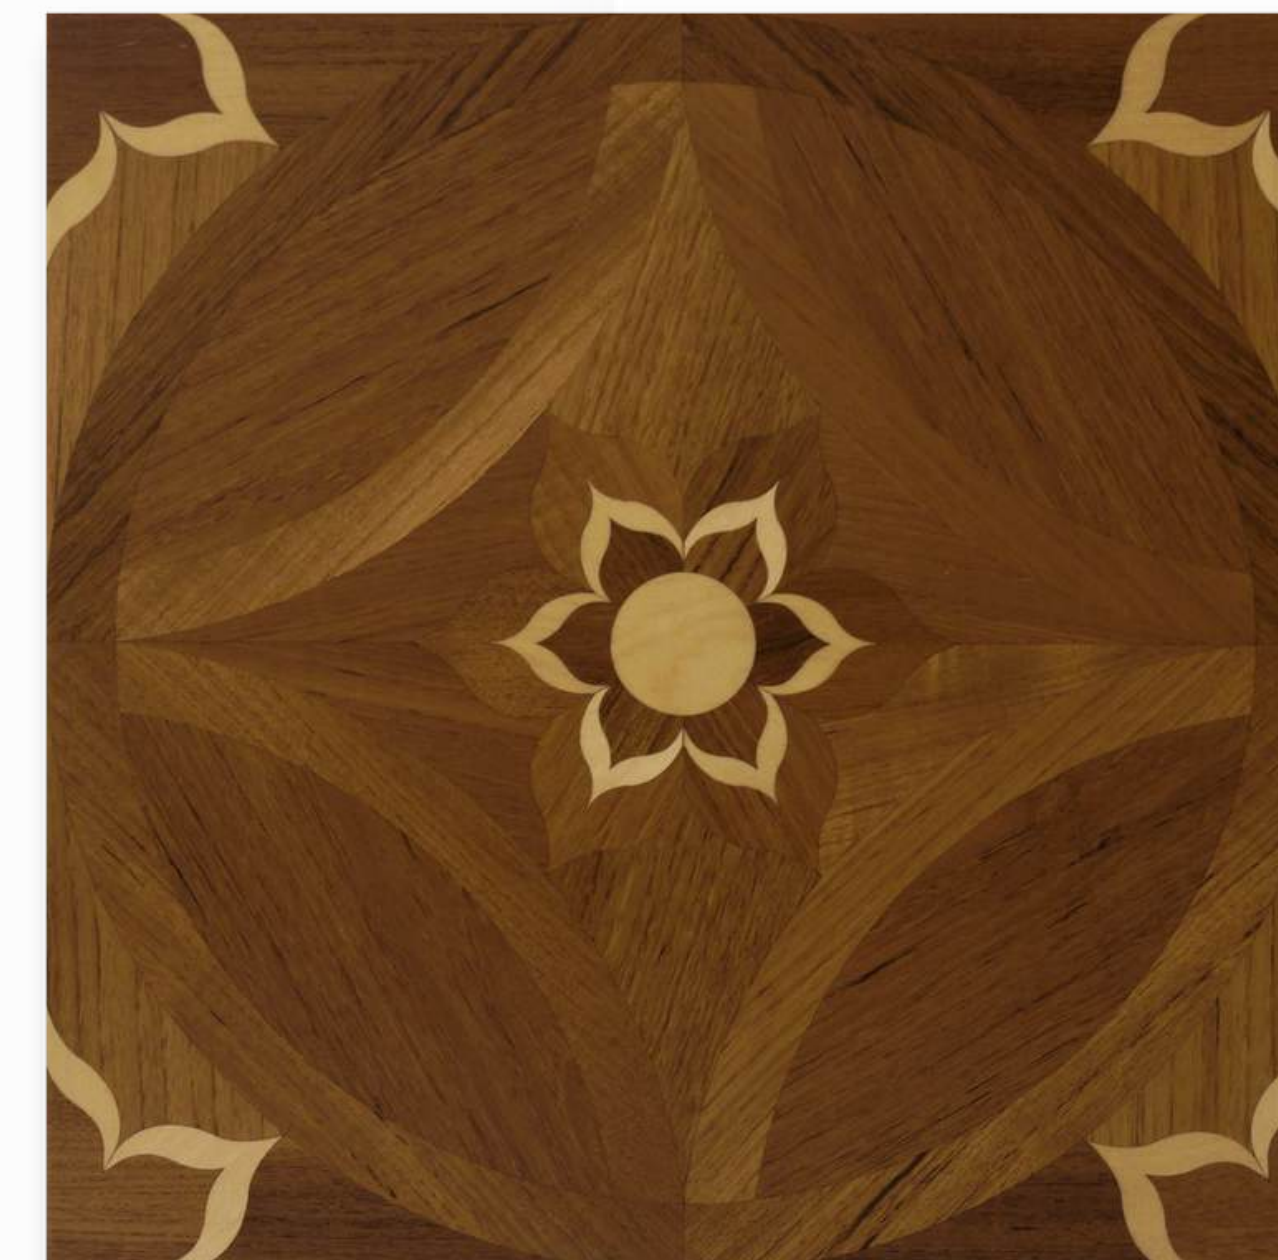

Product Code : Brocade flower 5823
Material: Teak wood + Chinese maple
Packaging: 450*450*15MM*10/2.025M2
Technology: Plane
Surface thickness: 1.2mm

Skirting Board: 5823



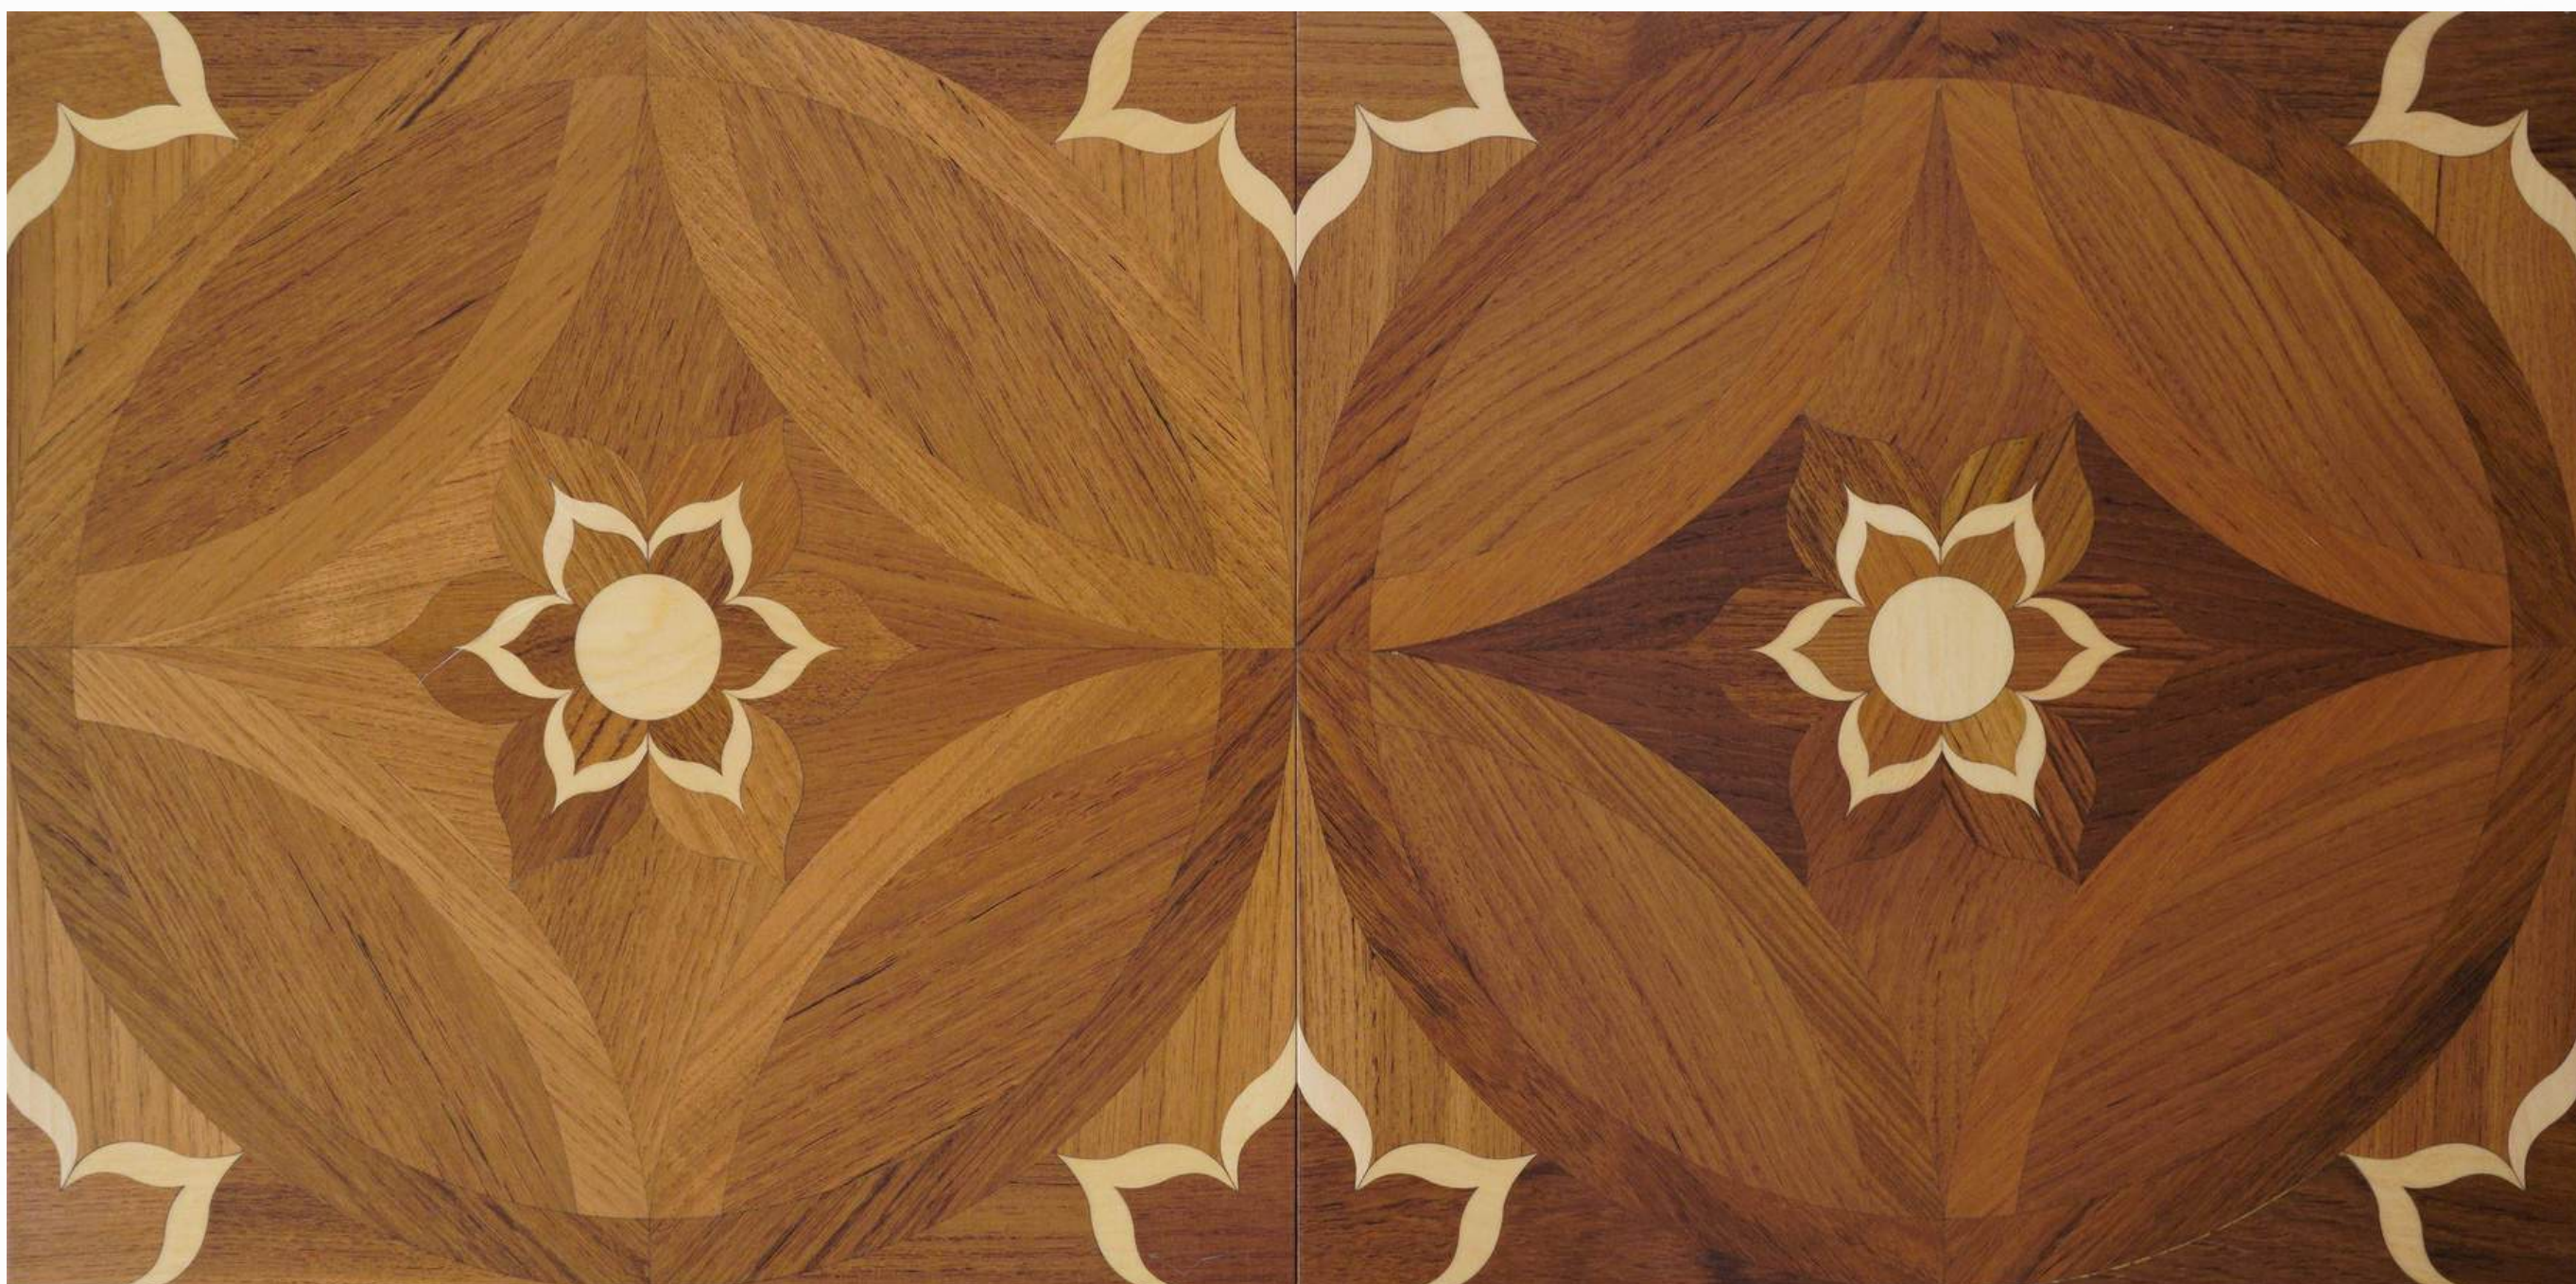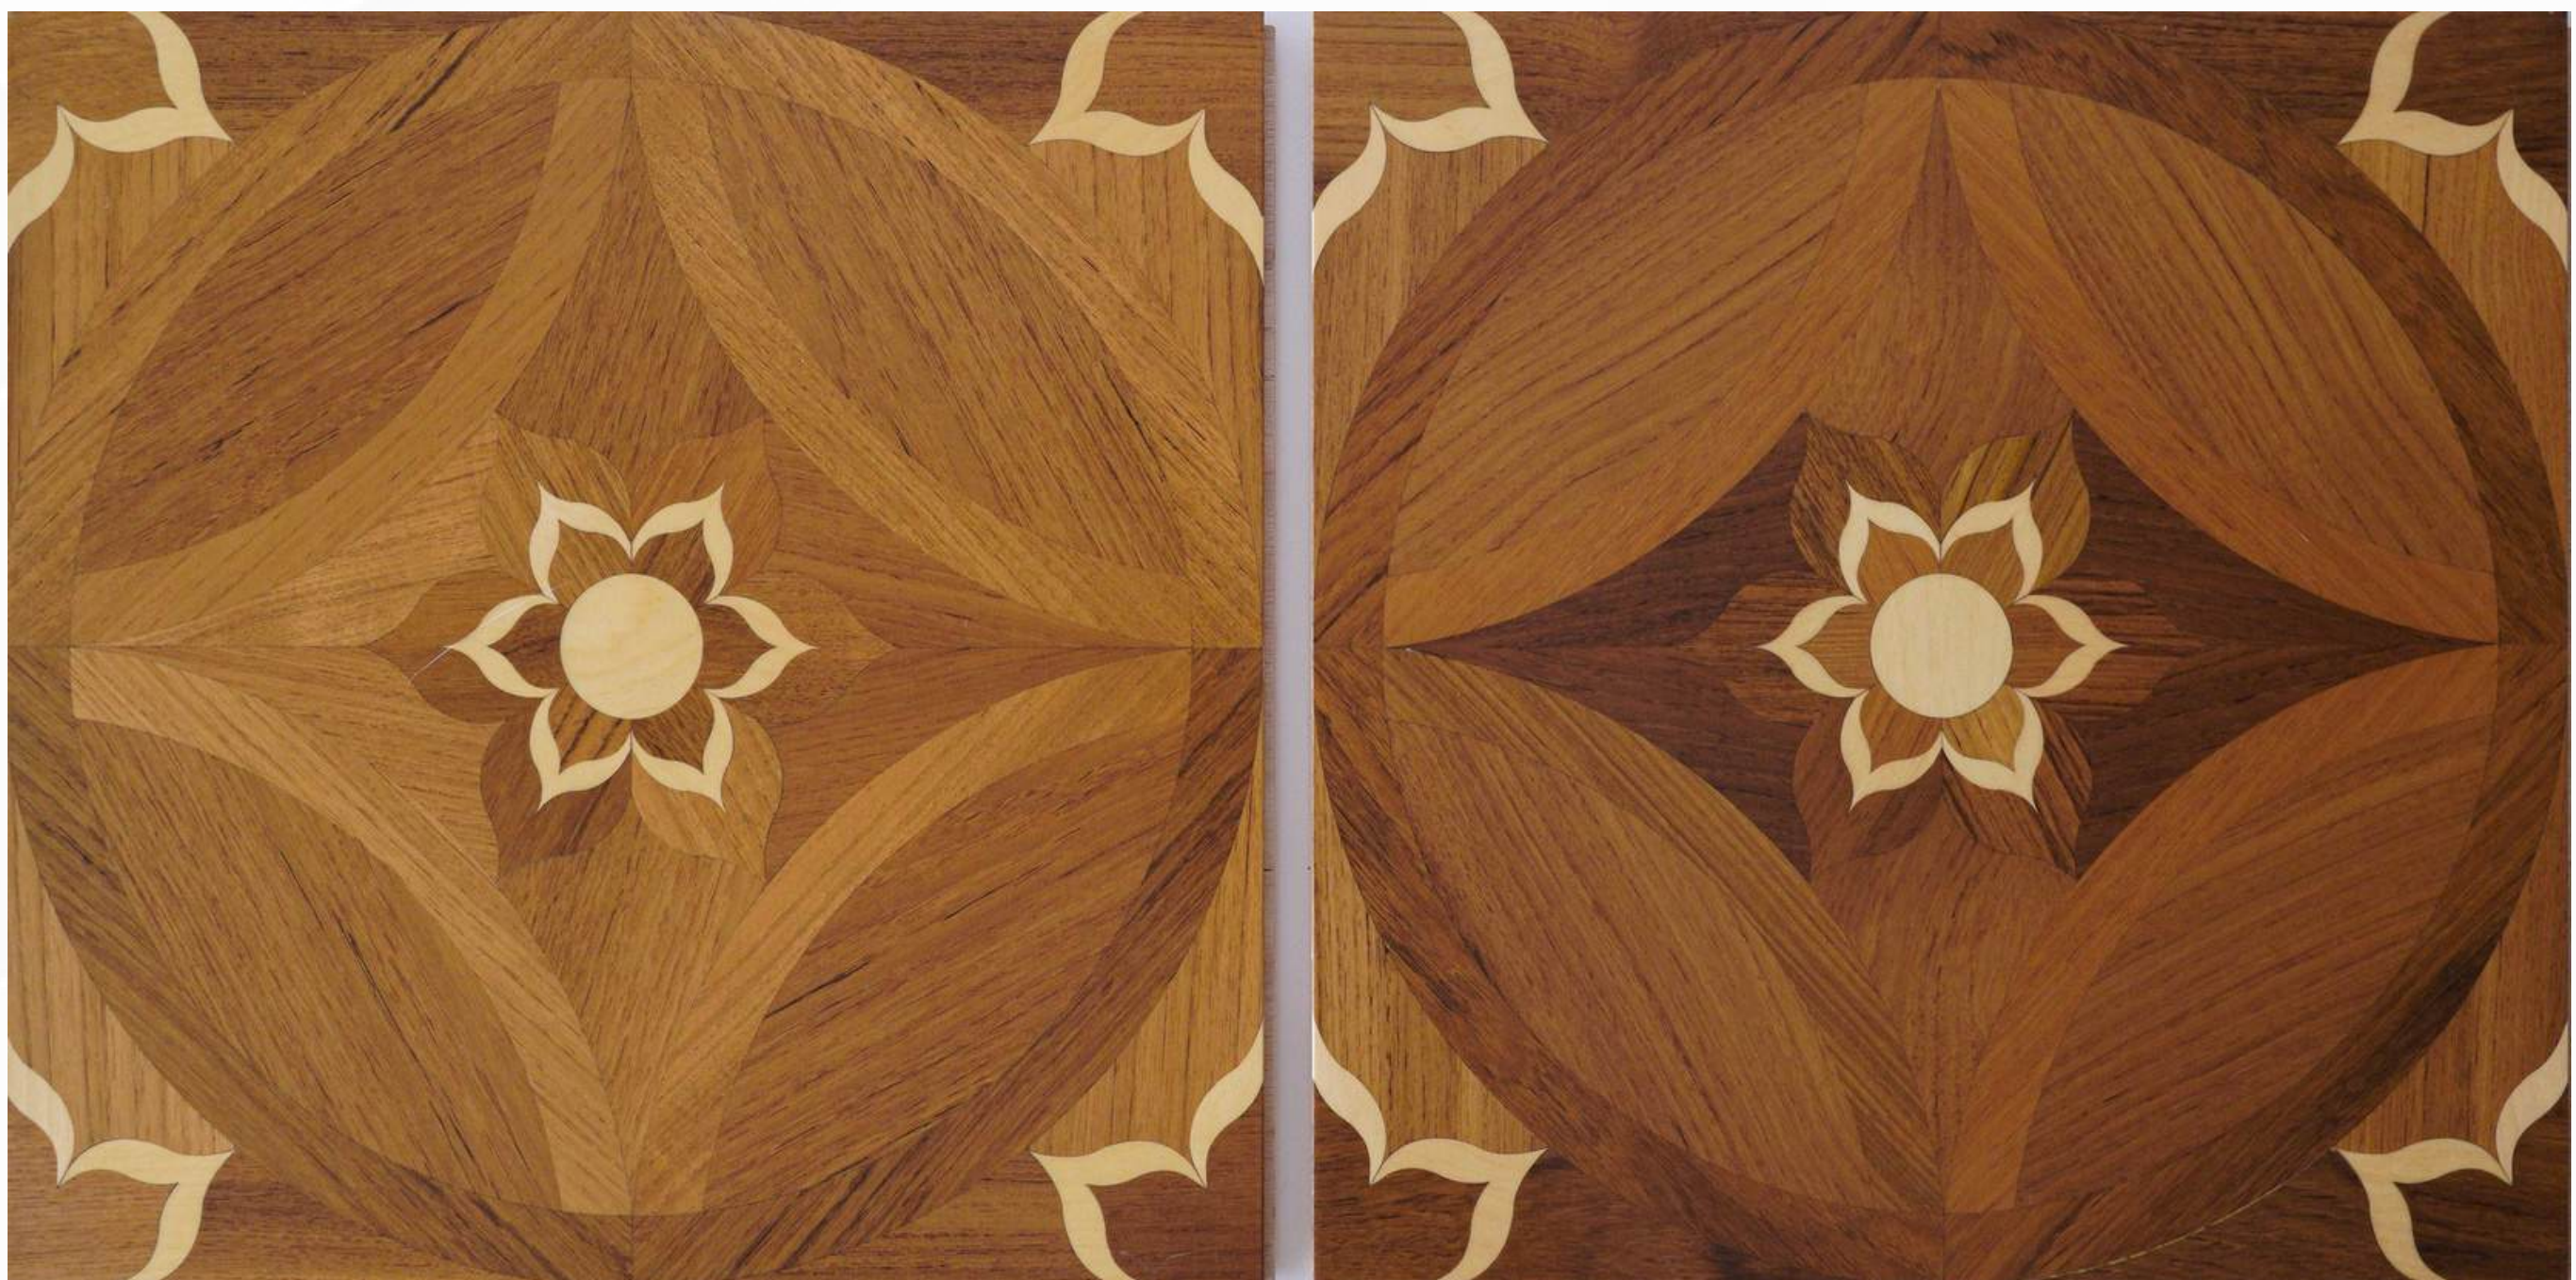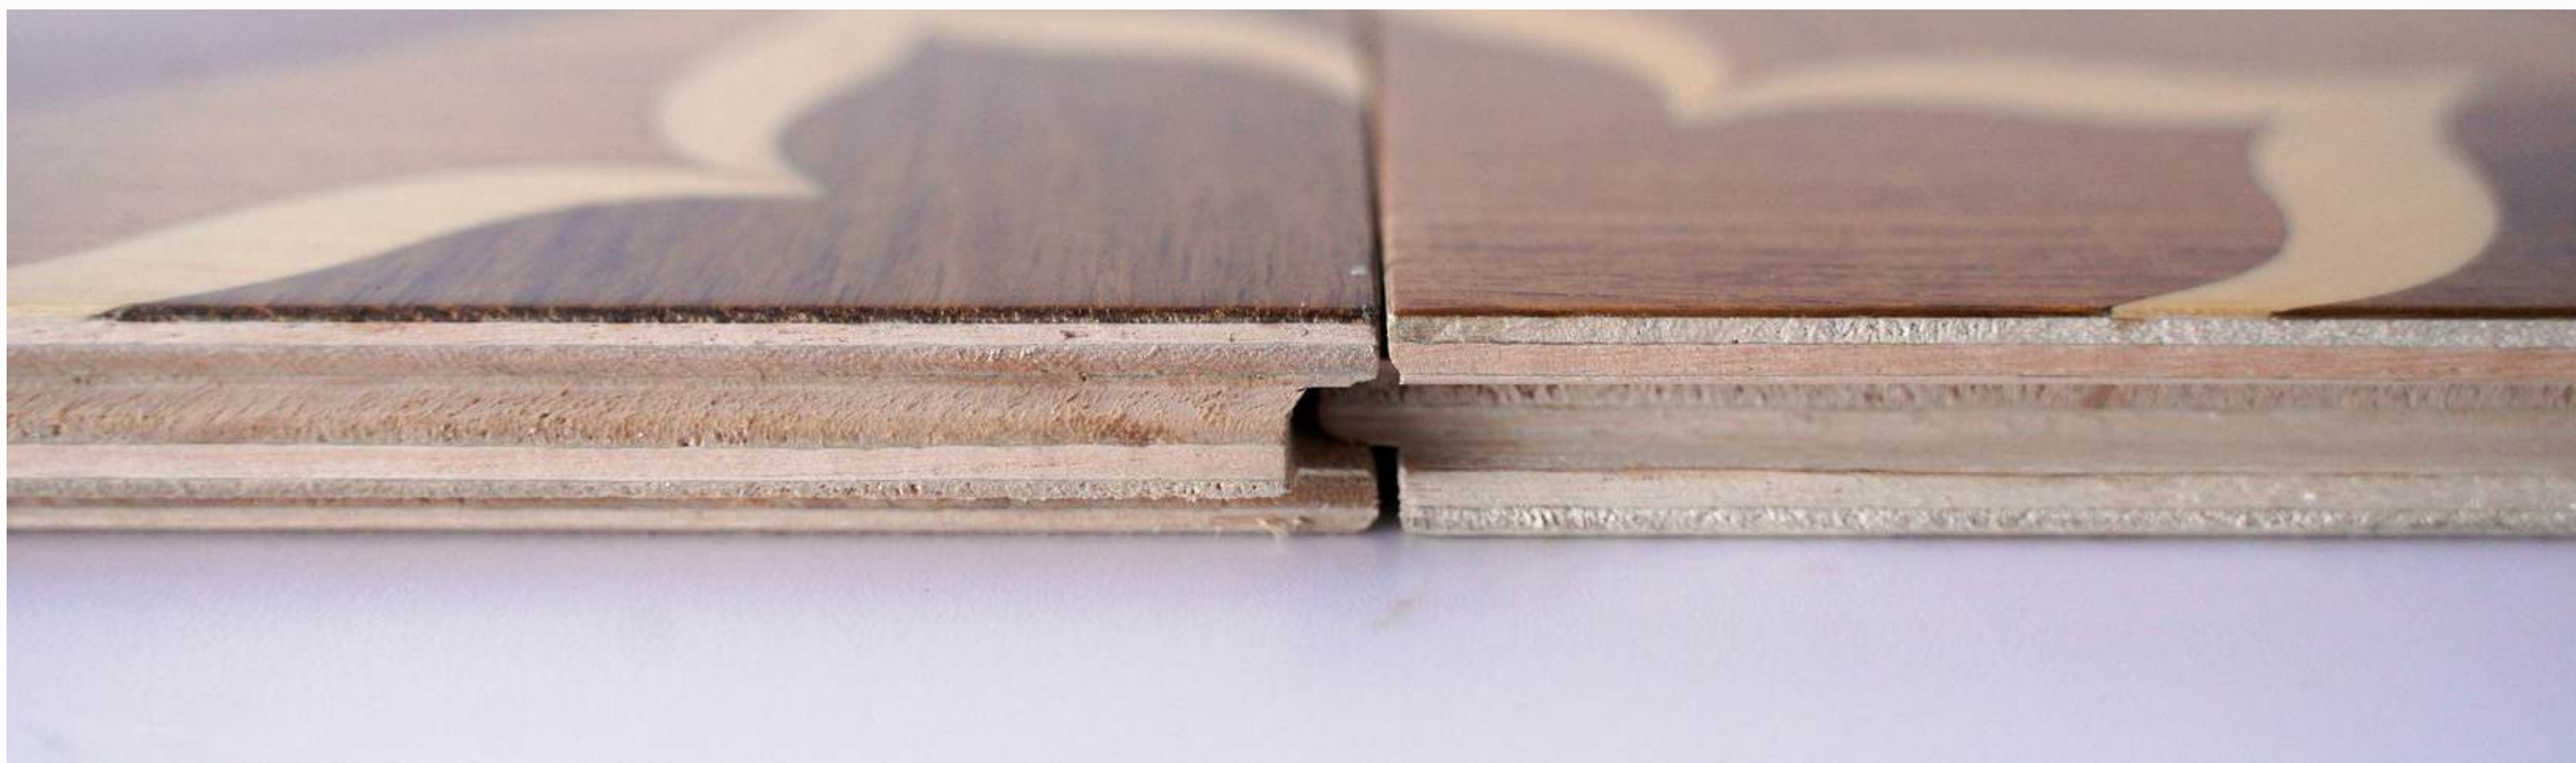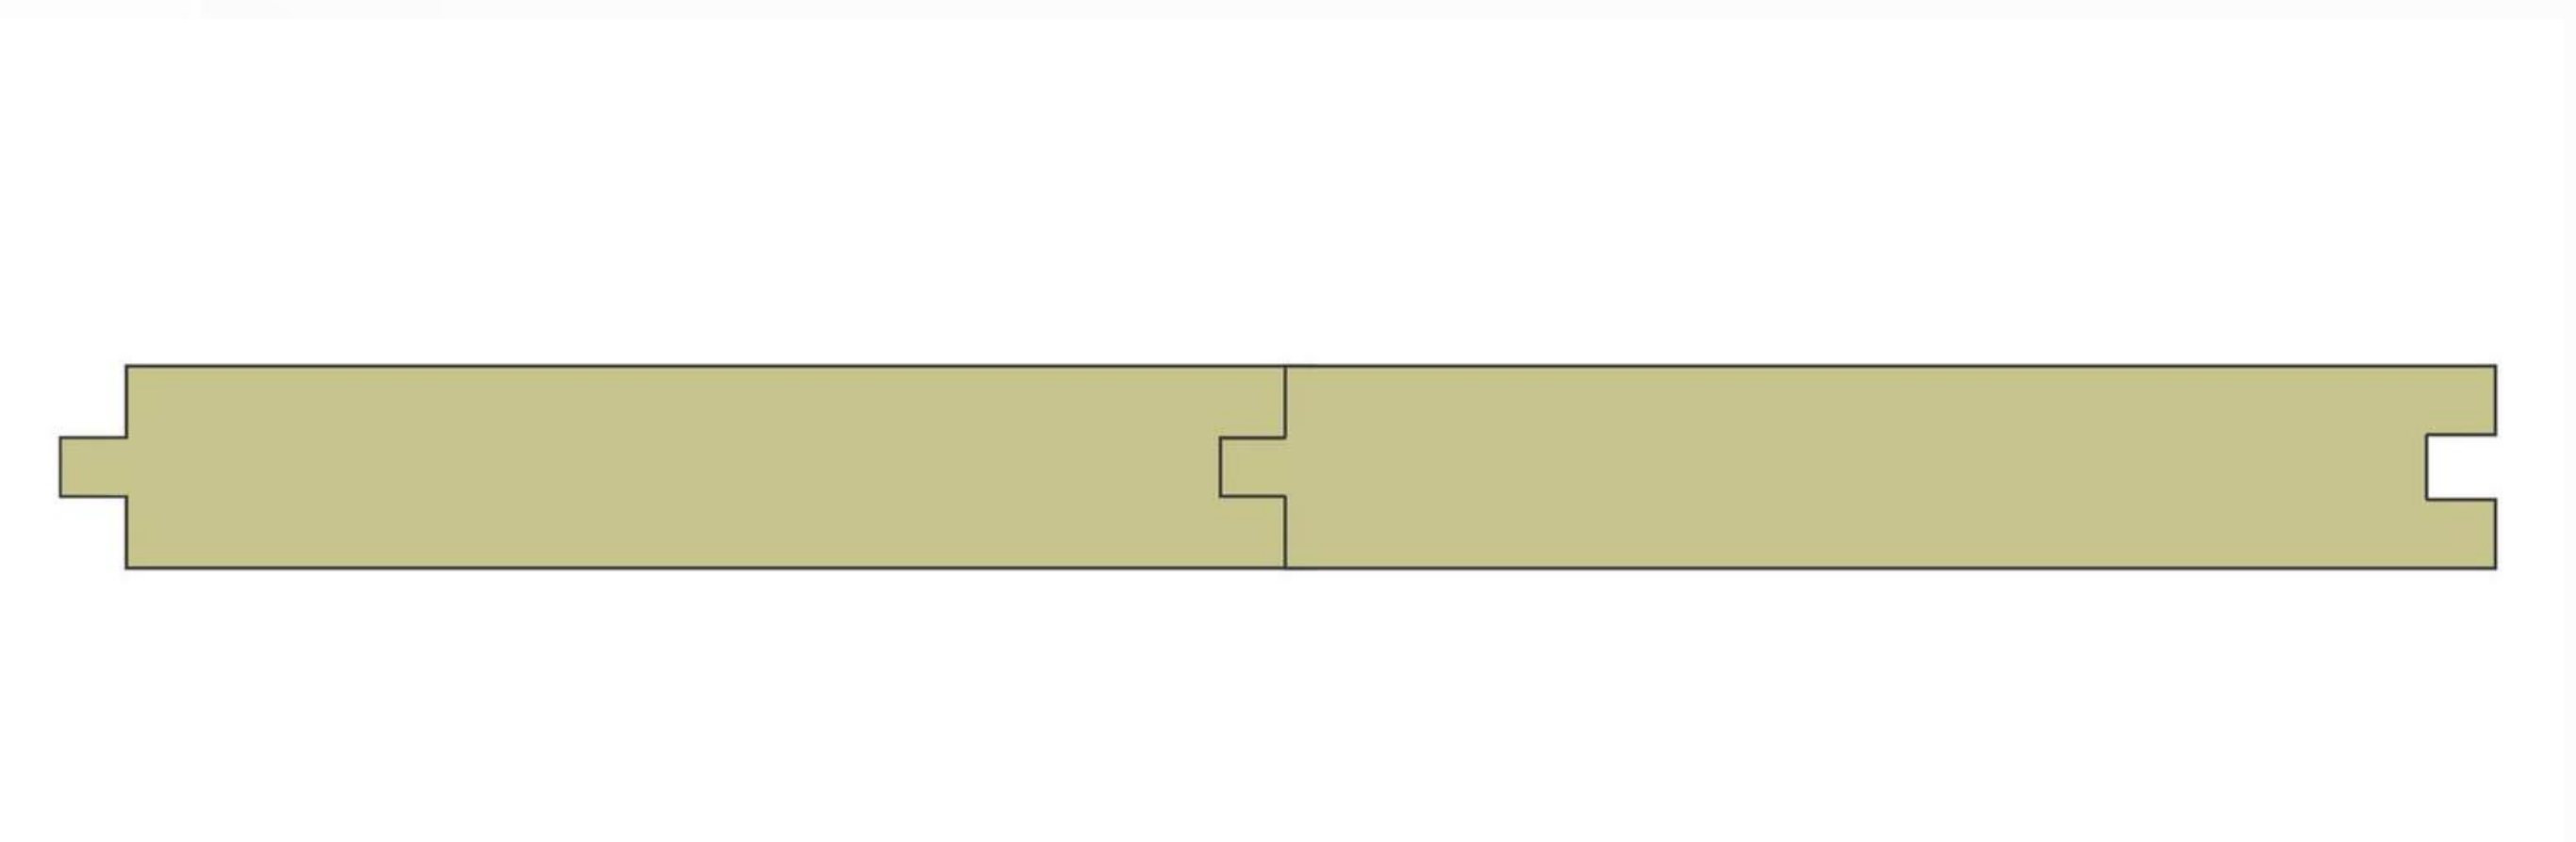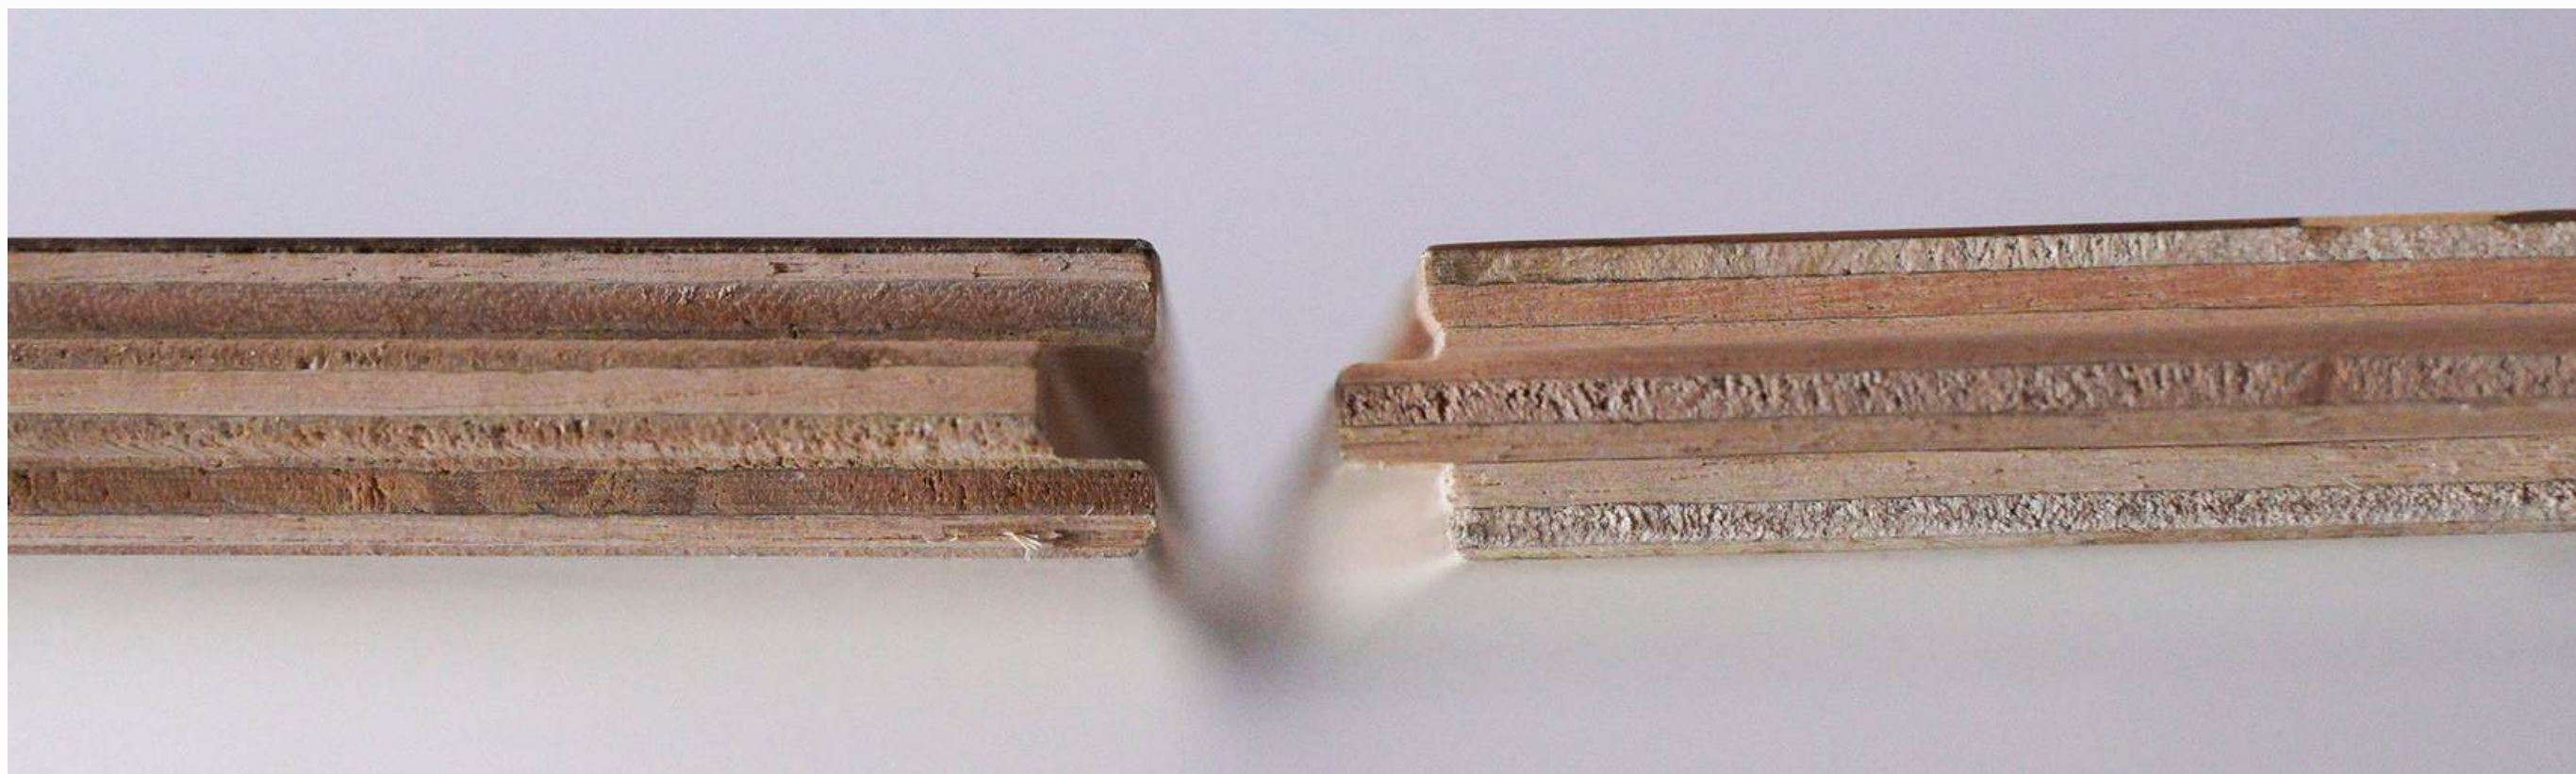

APPLICATIONS

- Luxury Residences: Villa entrance halls, living room wall base areas, master bedroom centers.
- Commercial Spaces: Hotel lobbies, luxury goods stores, art galleries, clubs.
- Areas Requiring Caution When Using: High-humidity areas (prone to deformation), environments with underfloor heating (select wood with extremely high stability such as teak).







检 验 报 告

TEST REPORT

产 品 名 称 实木复合地板
Product Description
规 格 型 号 /
Model/Specification
委 托 单 位 青岛海洋之光建材有限公司
Client
检 验 类 别 委托检验
Test Type

QTC 青 岛 市 产 品 质 量 检 验 研 究 院
Qingdao Product Quality Testing Research Institute

青岛市产品质量检验研究院
Qingdao Product Quality Testing Research Institute
检 验 报 告
TEST REPORT

共3页 第1页

产品名称 * Product Description	实木复合地板	商 标 * Trade Mark	/
规格型号 * Model/Specification	/	样品等级 * Sample Grade	合格品 ENF级
生产单位/地址 * Manufacturer/Addr.	青岛海洋之光建材有限公司	联系电话 * Telephone	/
委托单位/地址 * Client/Addr.	青岛海洋之光建材有限公司/青岛李沧区合川路17-1号	联系电话 * Telephone	15206449096
检验类别 Test Type	委托检验	送样日期 Sample Delivered Date	2025-01-14
样品数量 Sample Quantity	12块	生产日期 * Production Date	未标注
样品状态 Sample Condition	样品状态完好	送 样 者 * Sample Delivered by	杨曼
检验日期 Test Date	2025-01-15 ~ 2024-02-22	样品编号 Sample No.	202516000222
检验项目 Test Items	详见报告		
检验依据 Reference Documents for the Test	GB/T 18103-2022 《实木复合地板》		
检验结论 Test Conclusion	所检项的检测结果均符合标准要求。 <div>(检验检测专用章) (Special Stamp of Test Report) 签发日期: 2025-02-28 Issue Date</div>		
备注 Notes	带*信息由委托方提供。 本报告结果仅对来样负责。		
批准: Approved By	祝建中	审核: Verified By	曾盼
		主检: Tested By	于富磊

青 岛 市 产 品 质 量 检 验 研 究 院 检 验 报 告 附 页

共3页 第2页

序号	检验项目	技术要求	检验结果	单项判定
1	浸渍剥离	任一边的任一胶层开胶的累计长度不超过该胶层长度的1/3 (3mm以下不计)。	不超过1/3	符合
2	含水率 %	5.0≤含水率≤15.0%	7.6%	符合
3	漆膜附着力, 级	≥四	五	符合
4	表面耐污染, 级	≥4	5	符合
5	甲醛释放量 mg/m³	ENF≤0.025	0.012 (达到稳定状态时间: 54h)	符合

以 下 空 白

共3页 第3页

声 明

- 1、检验报告无检验单位公章或“检验检测专用章”无效。
- 2、检验报告未经本院/中心书面批准不得复制（全文复制除外），经特许复制的报告需重新加盖检验单位公章或“检验检测专用章”，否则无效。
- 3、检验报告无主检、审核、批准人签章无效。
- 4、检验报告涂改无效。
- 5、对检验报告结果若有异议，食品检验应于收到报告之日起七个工作日内、其它产品检验应在收到报告之日起十五日内向本院/中心书面提出（监督抽查报告向任务安排单位提出），逾期不予受理。
- 6、送样检验，检验结果仅对来样负责，送样检验样品及相关信息均由委托方提供，本院/中心不对其真实性及完整性负责。未经本院/中心同意，委托方不得擅自使用检验结果进行不当宣传。

- 1、The report is invalid without Special stamp for inspection report.
- 2、Do not copy the report unless specially permitted. The copy must be sealed with Special stamp for inspection report ,otherwise it would be invalid.
- 3、The report would be invalid if there is no signature of the major inspector, verifier or authorizer.
- 4、The report would be invalid if altered.
- 5、Any question with the report should be submitted to the inspection organization within 15 days (7days for food inspection) from receiving the report .Otherwise it is not accepted.
- 6、The results shown in this report refer is responsibility for the received sample(s) only. It acquaint the client with sample quality only. The report could not be used for any advertisement and testimony.

地址： 青岛市崂山区科苑纬四路77号 Add : No.77 Keyuanwei Four Road Qingdao China

邮编： 266101 P.C. : 266101

电话： 0532-6806-9100 Tel : 0532-6806-9100

传真： 0532-6806-9111 Fax : 0532-6806-9111

网址： www.qtc.org.cn Website : www.qtc.org.cn

E-mail: qdzjs@qtc.org.cn E-mail : qdzjs@qtc.org.cn